
GRANDVIEW | Fireplaces

Built-In Multiview Vapor-Fire

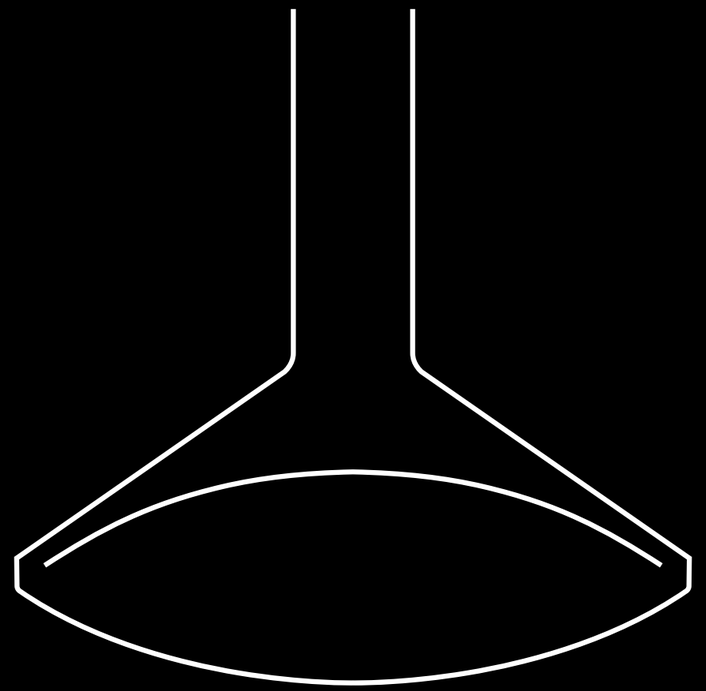

CF + D | custom fireplace design

www.customfireplacedesign.com

August 2026

CF + D | custom fireplace design



QUALITY | CREATIVITY | INNOVATION



CF + D | custom fireplace design has mastered the skills and technology required to design and fabricate highly innovative, one-of-a-kind fireplaces often in dimensions and finishes that have been created for the first time. With a team of highly skilled craftsmen proficient in the art of shaping, fabricating and welding steel materials, CF + D is committed to breaking the paradigms and pushing the boundaries of fireplace design possibilities. With enthusiasm and passion for our craft of custom designing and fabricating unique fireplaces, we outperform expectations providing solutions for our client's design criteria.

As a full design/build manufacturing company, CF + D is expanding their own production line of artistic contemporary designs.

GRANDVIEW | Fireplaces: An exclusive collection of Multi-View built-in linear fireplaces incorporating the Vapor-Fire burner system. With an expanded viewing area height of 28" and a variety of layout options and burner sizes, this collection has been designed to meet and exceed industry standards.

Vapor-Fire technology creates the illusion of a realistic fireplace using regular tap water and LED lighting, creating a viable solution for installations in multi-family buildings, hospitality suites, lobbies, restaurants, and private homes. Free from chimney venting requirements with zero combustible issues and no safety liabilities, all Vapor-Fire models are 100% efficient, adding to your LEED Certification Score.

SINGLE-SIDED | Vapor-Fire

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

32" **SINGLE-SIDED** | Built-In Vapor-Fire

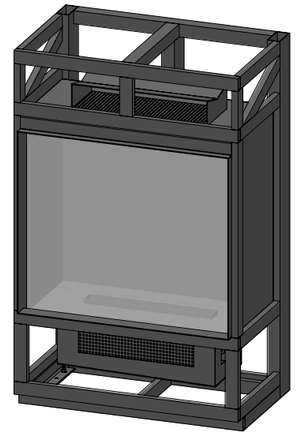

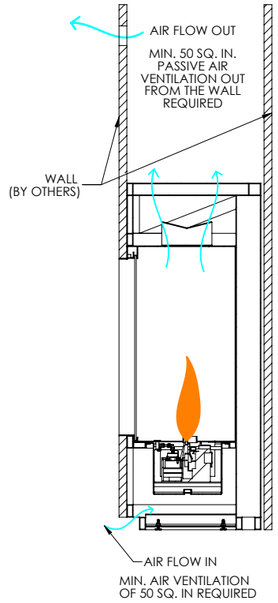

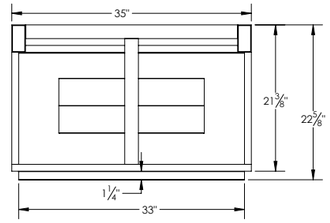

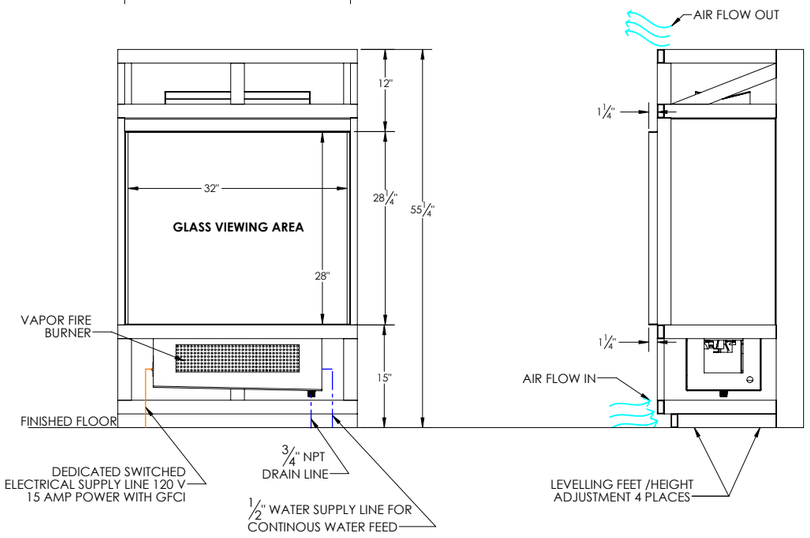

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	360 lbs.
Burner	1 X CDFI500P
Total Burner Length	20" Vapor-Fire Burner
Airflow Requirements	50 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

52" SINGLE-SIDED | Built-In Vapor-Fire

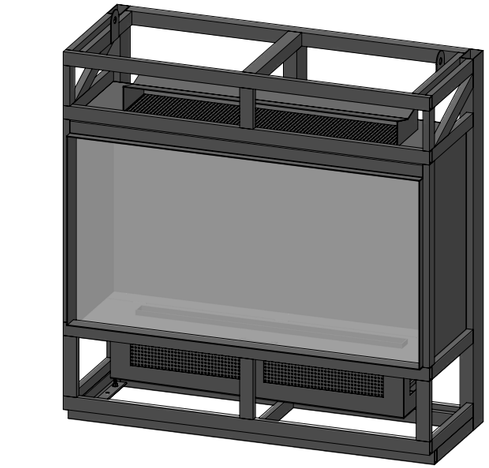

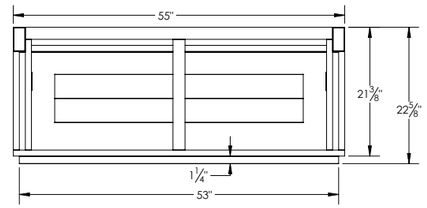

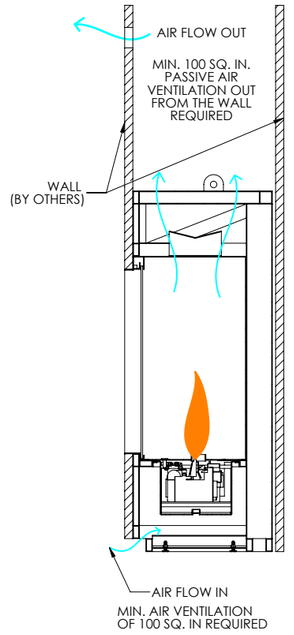

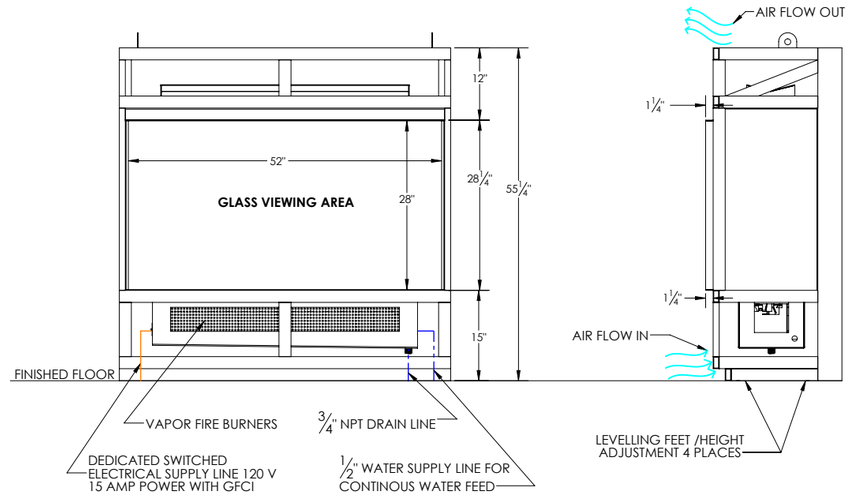

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	510 lbs.
Burner	2 X CDFI500P
Total Burner Length	40" Vapor-Fire Burner
Airflow Requirements	100 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

72" SINGLE-SIDED | Built-In Vapor-Fire

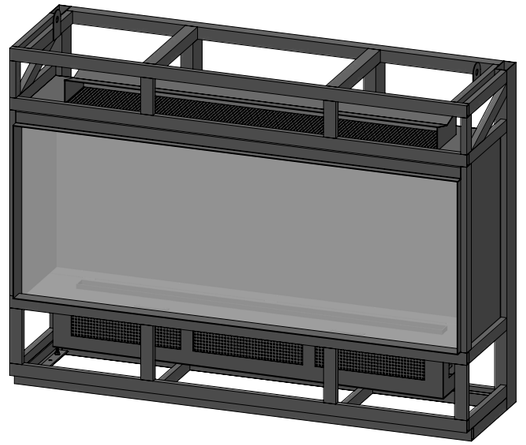

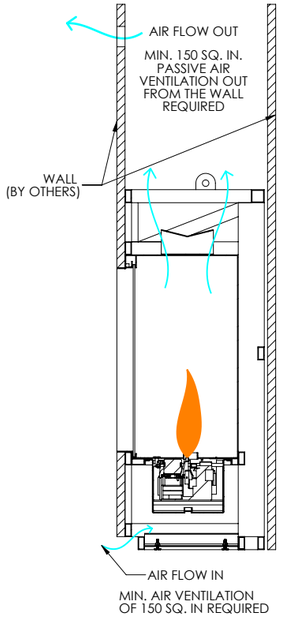

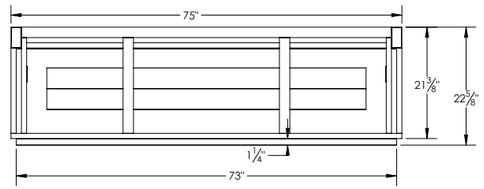

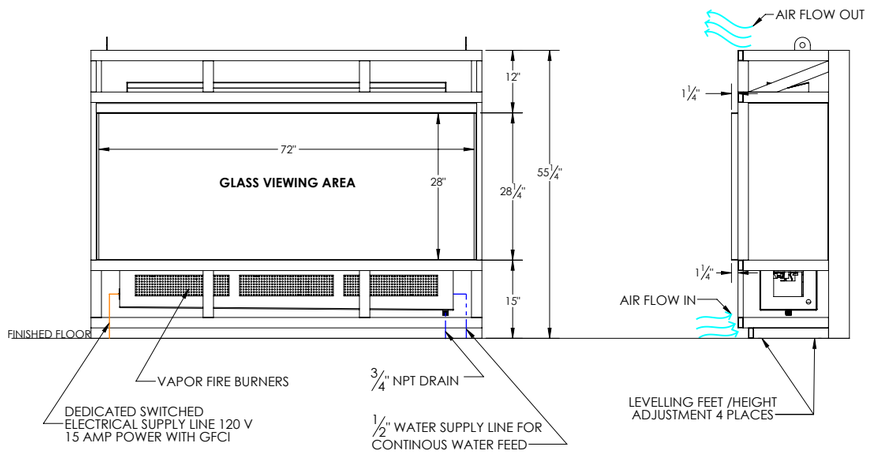

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	650 lbs.
Burner	3 X CDFI500P
Total Burner Length	60" Vapor-Fire Burner
Airflow Requirements	150 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

96” SINGLE-SIDED | Built-In Vapor-Fire

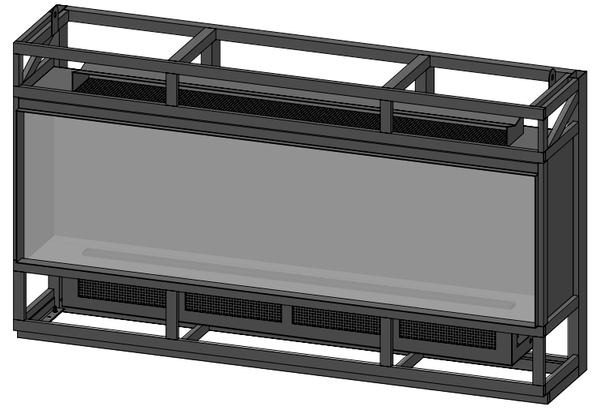

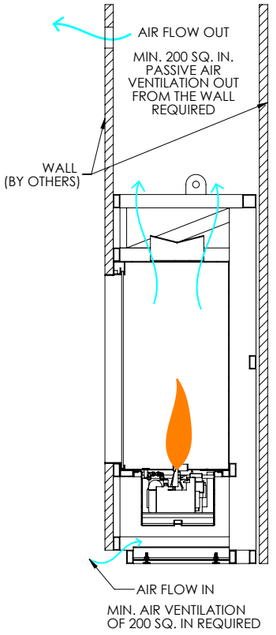

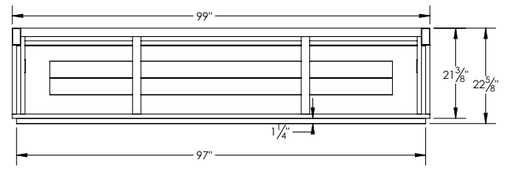

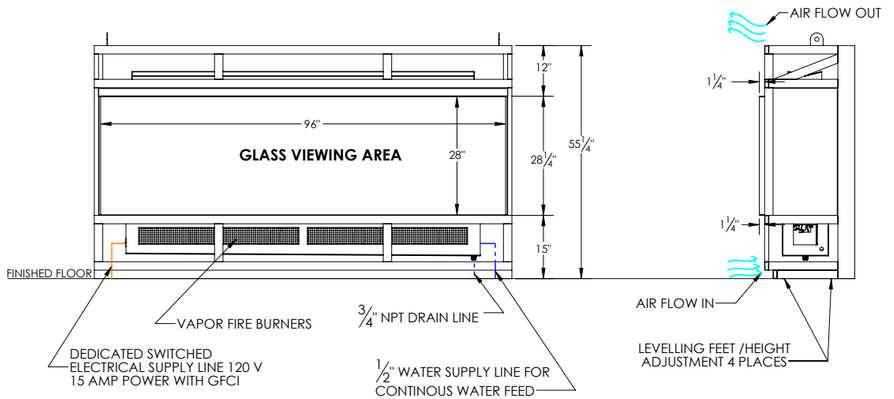

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	830 lbs.
Burner	4 X CDFI500P
Total Burner Length	80” Vapor-Fire Burner
Airflow Requirements	200 Square Inches

01/2026

SEE-THRU | Vapor-Fire

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

32" SEE-THRU | Built-In Vapor-Fire

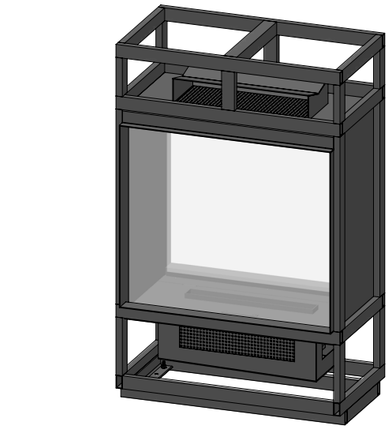

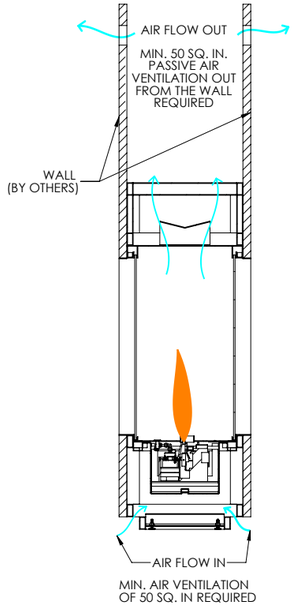

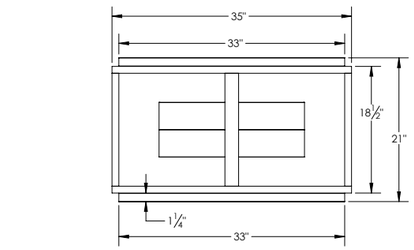

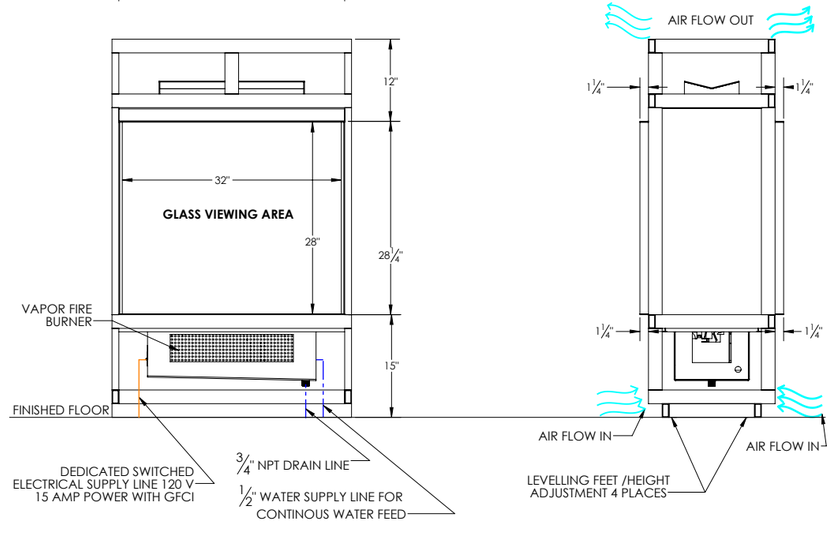

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	310 lbs.
Burner	1 X CDFI500P
Total Burner Length	20" Vapor-Fire Burner
Airflow Requirements	50 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

52" SEE-THRU | Built-In Vapor-Fire

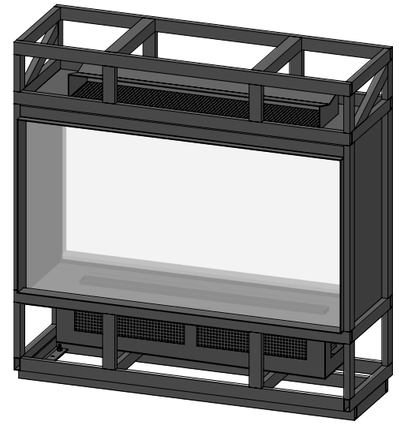

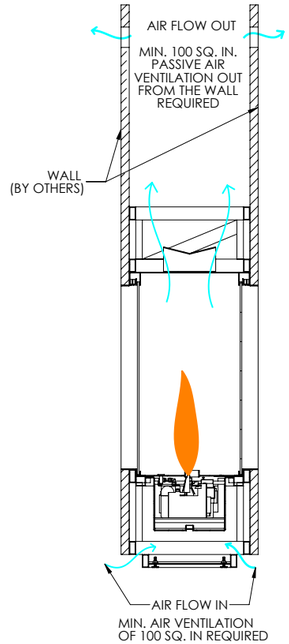

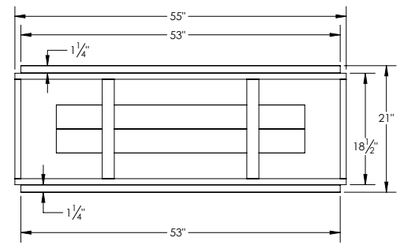

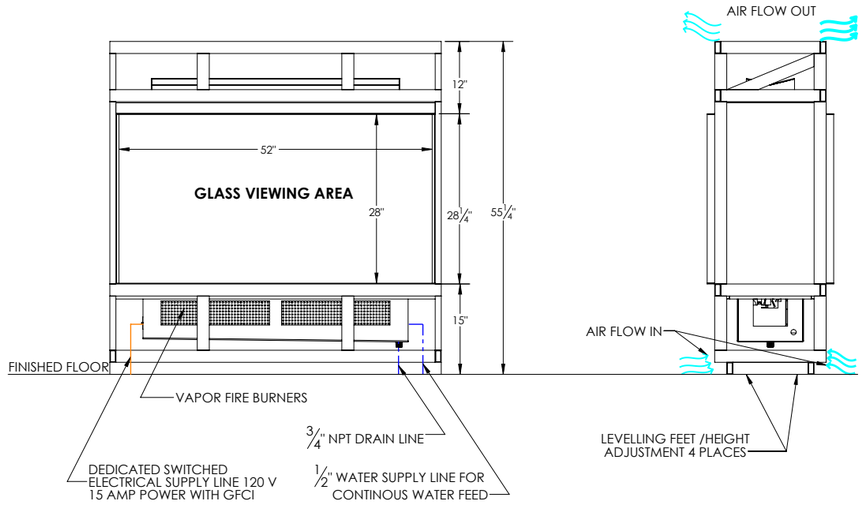

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	450 lbs.
Burner	2 X CDFI500P
Total Burner Length	40" Vapor-Fire Burner
Airflow Requirements	100 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

72” SEE-THRU | Built-In Vapor-Fire

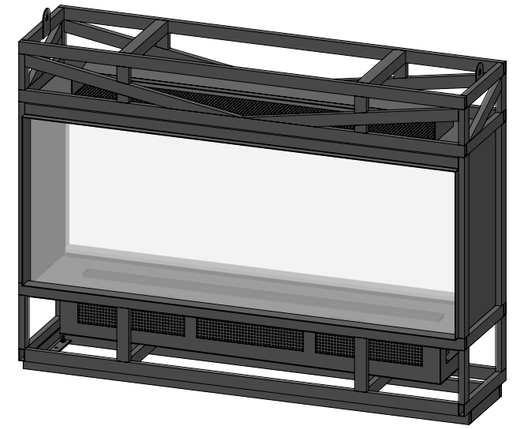

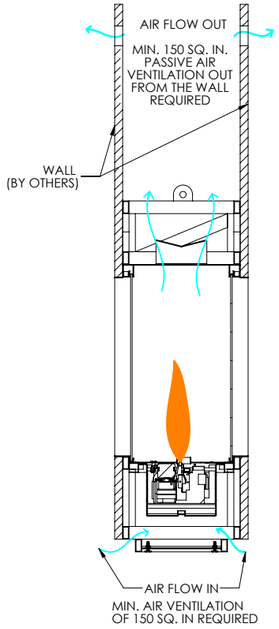

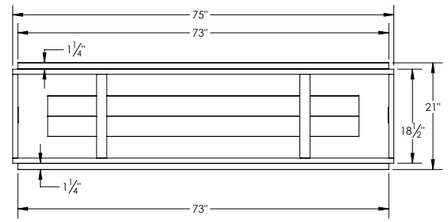

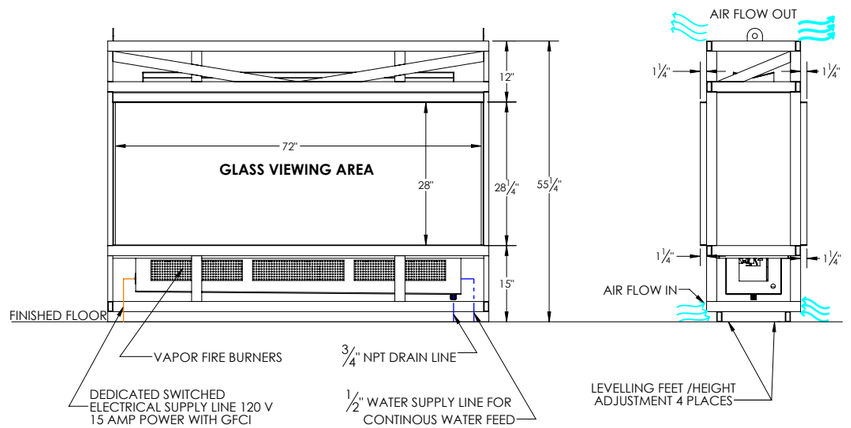

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	600 lbs.
Burner	3 X CDFI500P
Total Burner Length	60” Vapor-Fire Burner
Airflow Requirements	150 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.


96” SEE-THRU | Built-In Vapor-Fire

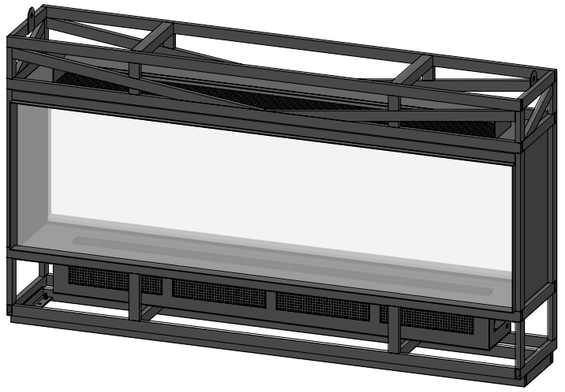

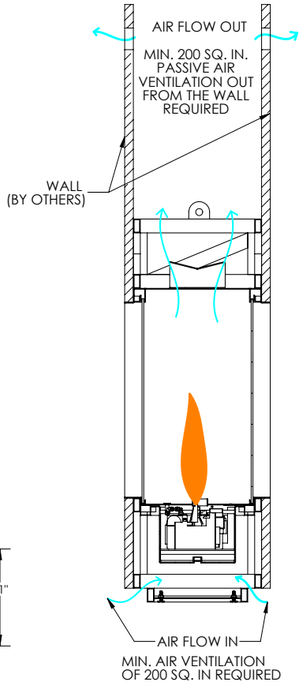

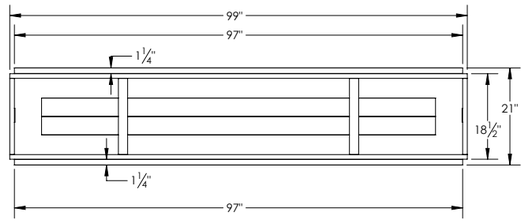

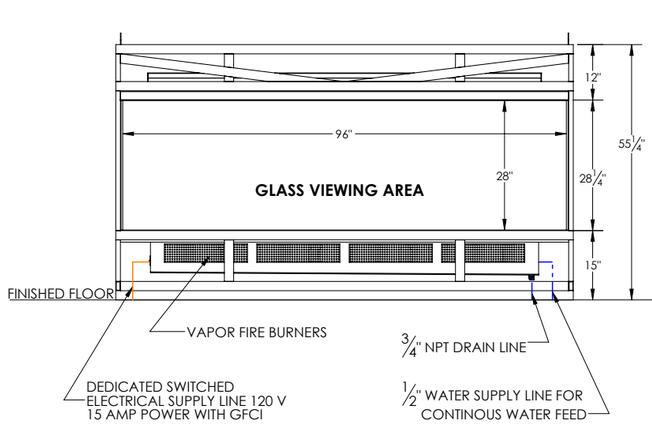

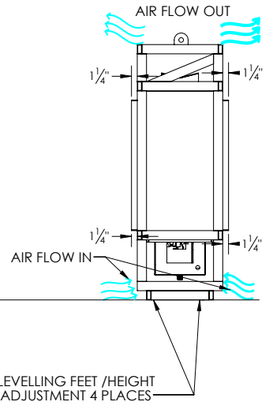

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	750 lbs.
Burner	4 X CDFI500P
Total Burner Length	80” Vapor-Fire Burner
Airflow Requirements	200 Square Inches

01/2026

LEFT-OPEN | Vapor-Fire

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

32" LEFT-OPEN | Built-In Vapor-Fire

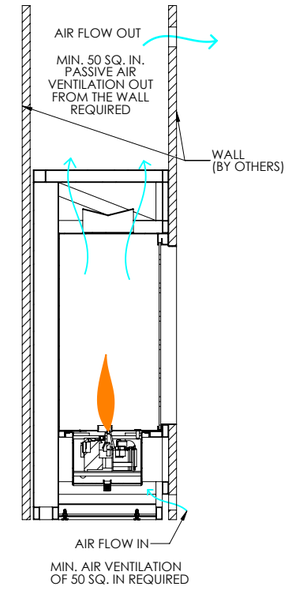

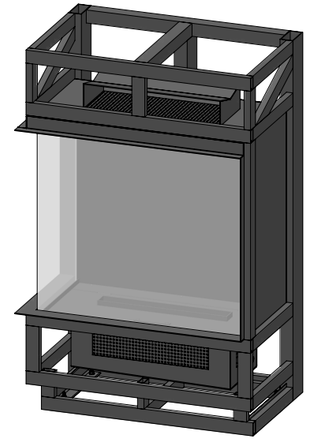



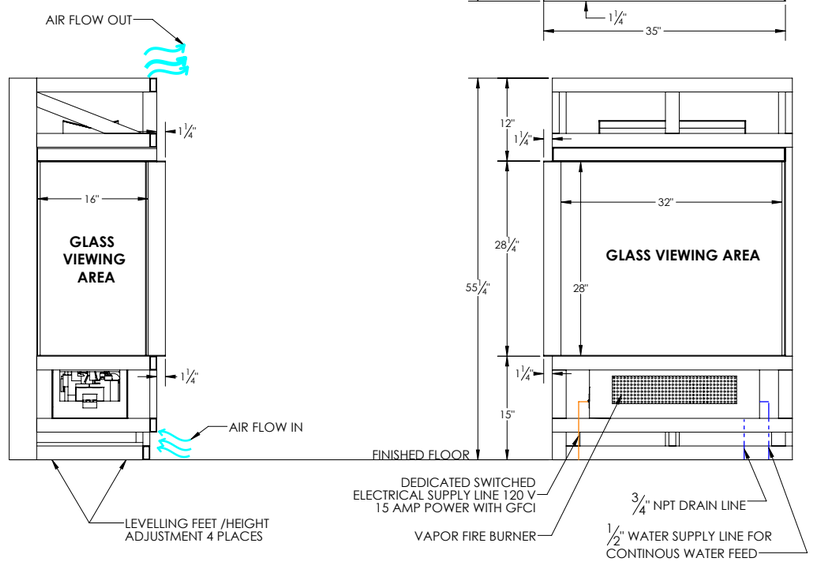

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	350 lbs.
Burner	1 X CDFI500P
Total Burner Length	20" Vapor-Fire Burner
Airflow Requirements	50 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

52" LEFT-OPEN | Built-In Vapor-Fire

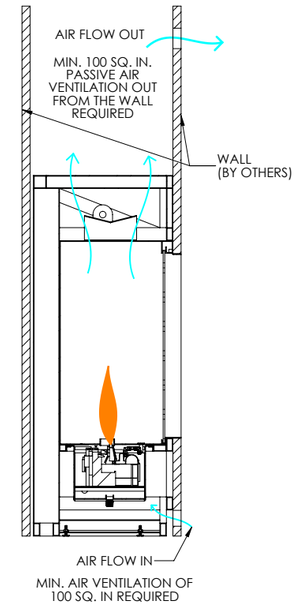

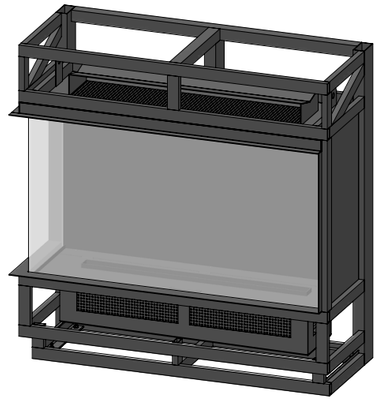

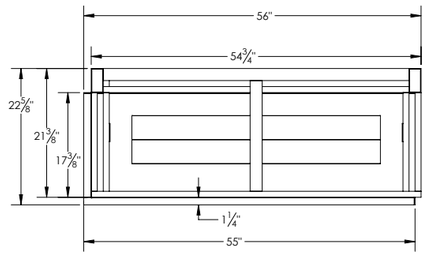

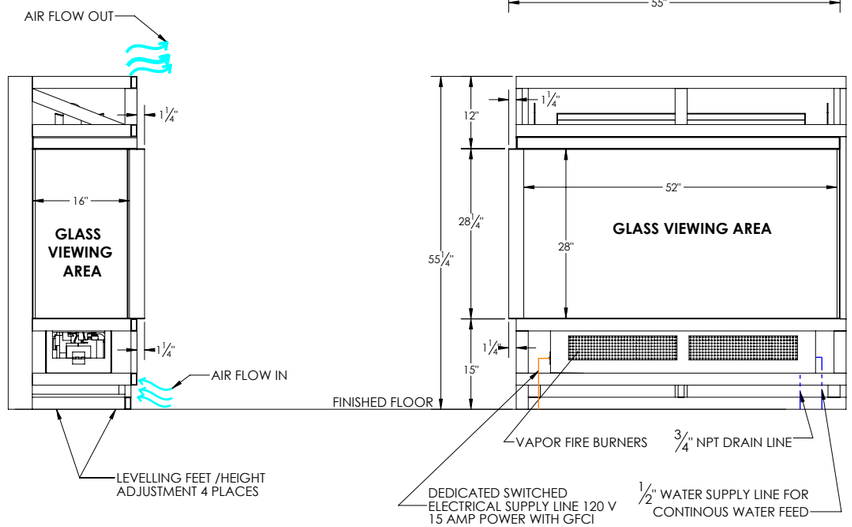

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	490 lbs.
Burner	2 X CDFI500P
Total Burner Length	40" Vapor-Fire Burner
Airflow Requirements	100 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

72” LEFT-OPEN | Built-In Vapor-Fire

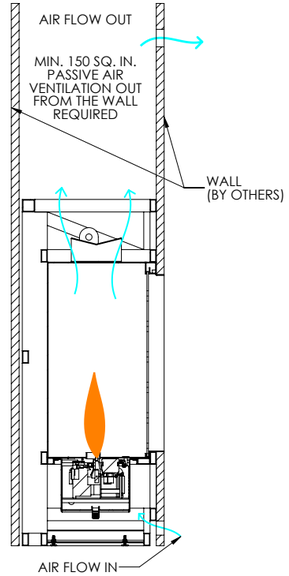

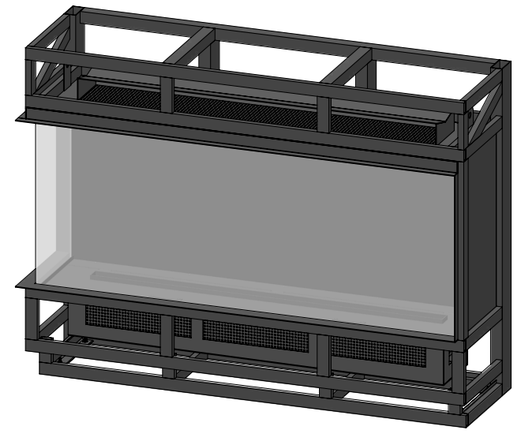

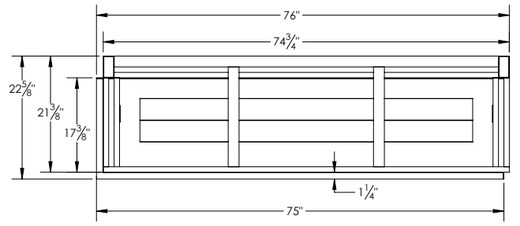

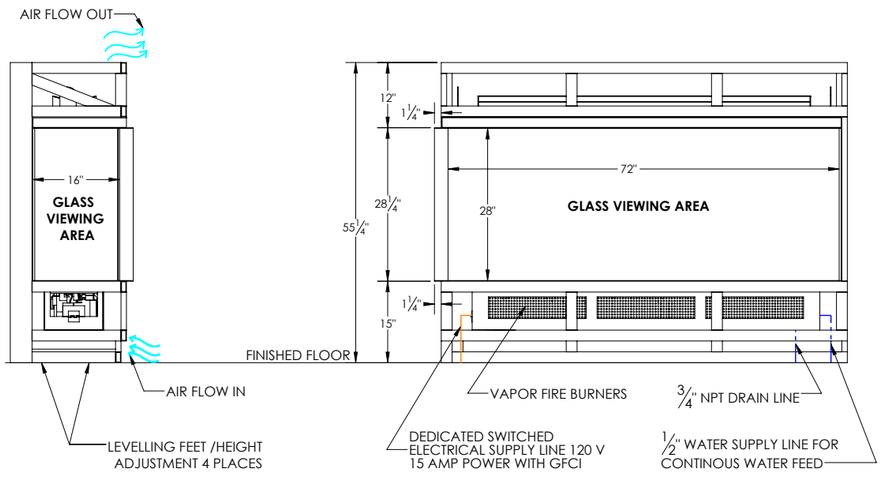

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	650 lbs.
Burner	3 X CDFI500P
Total Burner Length	60” Vapor-Fire Burner
Airflow Requirements	150 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

96” LEFT-OPEN | Built-In Vapor-Fire

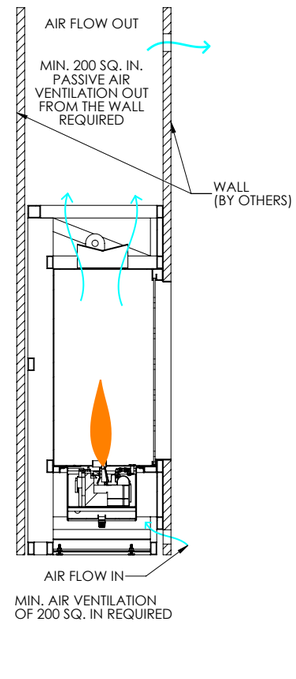

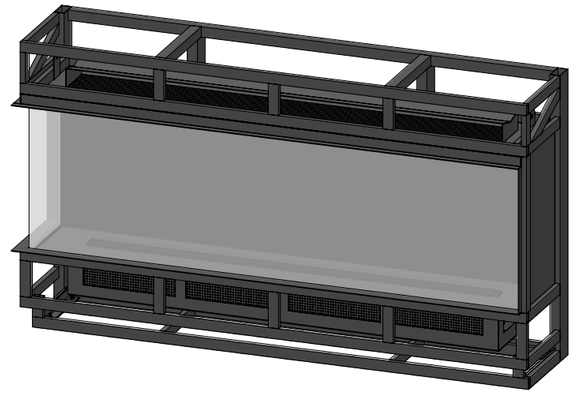

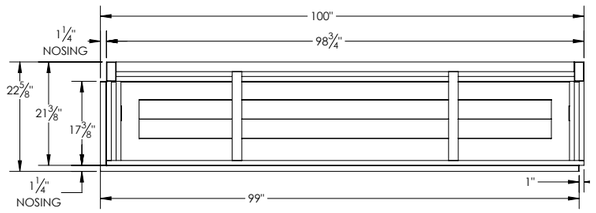

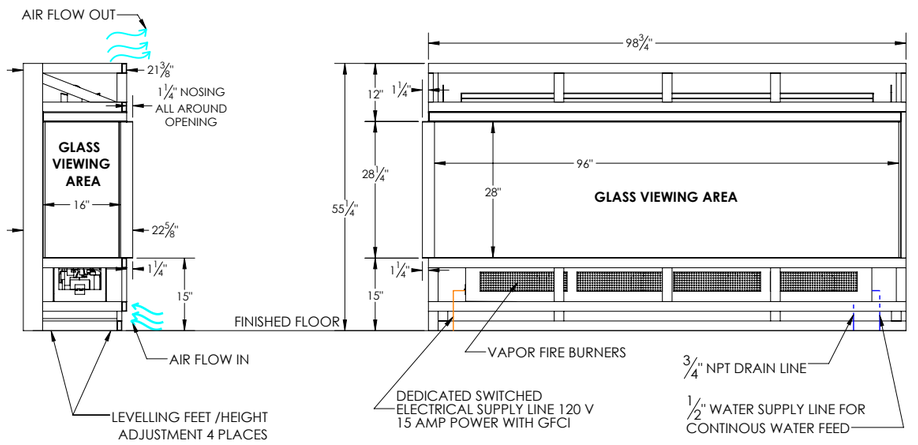

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	800 lbs.
Burner	4 X CDFI500P
Total Burner Length	80” Vapor-Fire Burner
Airflow Requirements	200 Square Inches

01/2026

RIGHT-OPEN | Vapor-Fire

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

32" RIGHT-OPEN | Built-In Vapor-Fire

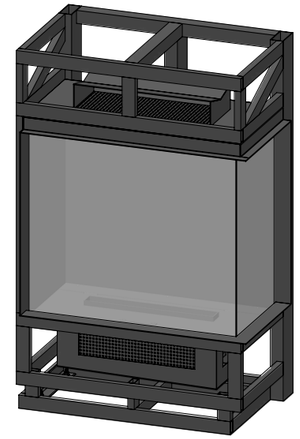

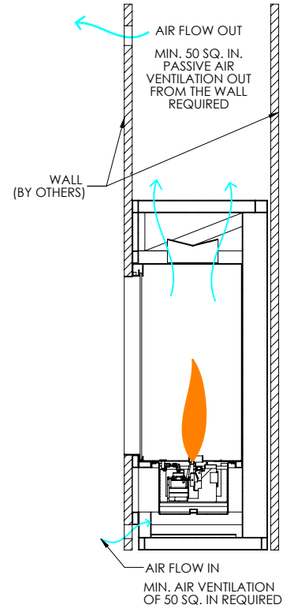

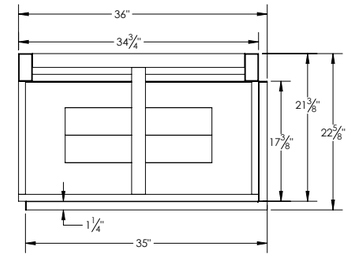

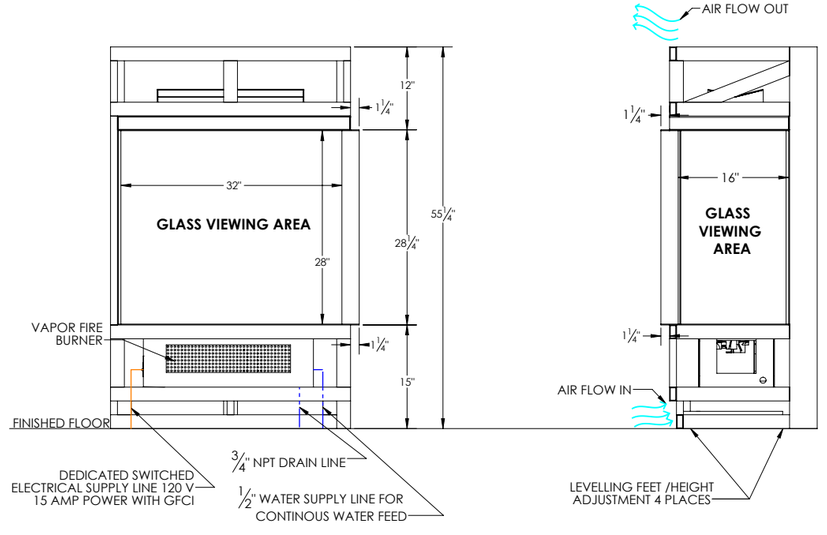

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	350 lbs.
Burner	1 X CDFI500P
Total Burner Length	20" Vapor-Fire Burner
Airflow Requirements	50 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

52" RIGHT-OPEN | Built-In Vapor-Fire

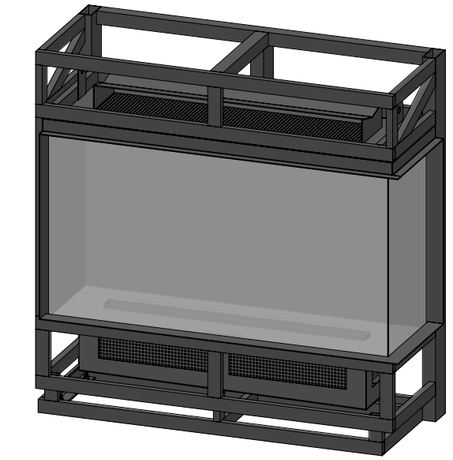

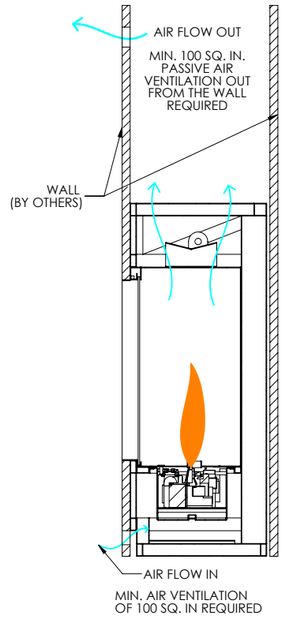

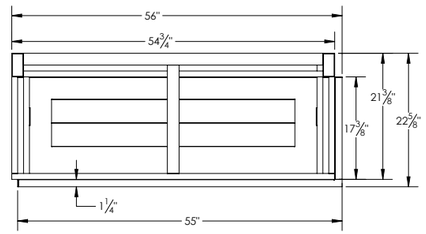

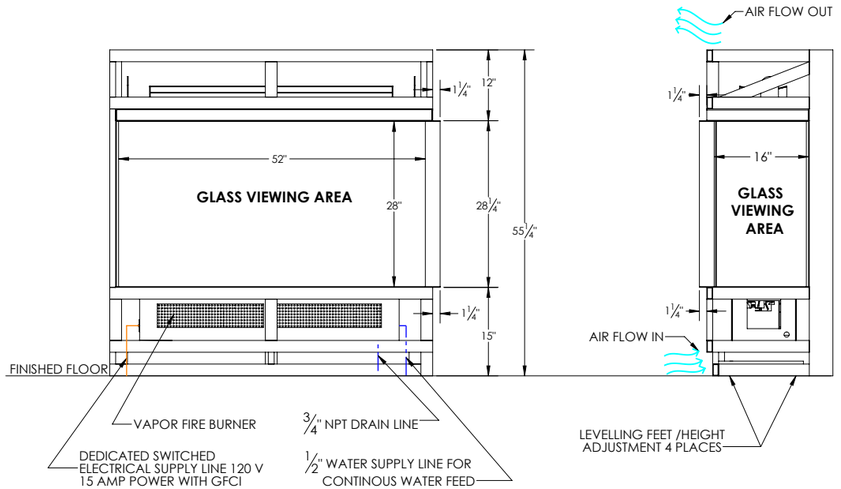

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	490 lbs.
Burner	2 X CDFI500P
Total Burner Length	40" Vapor-Fire Burner
Airflow Requirements	100 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

72” RIGHT-OPEN | Built-In Vapor-Fire

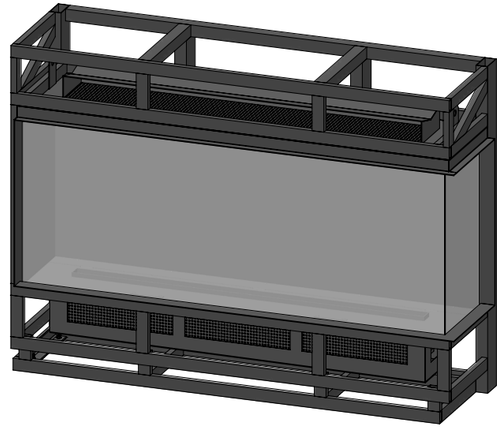

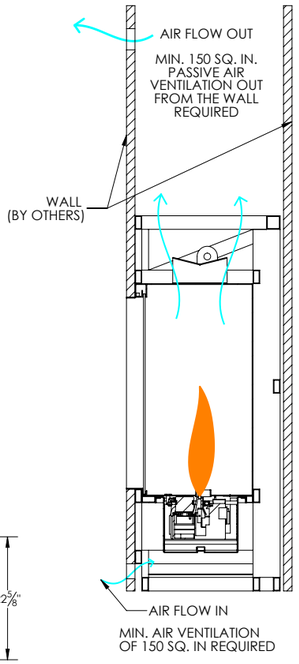

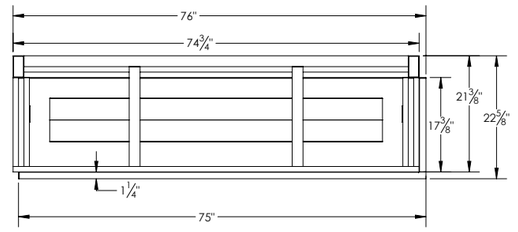

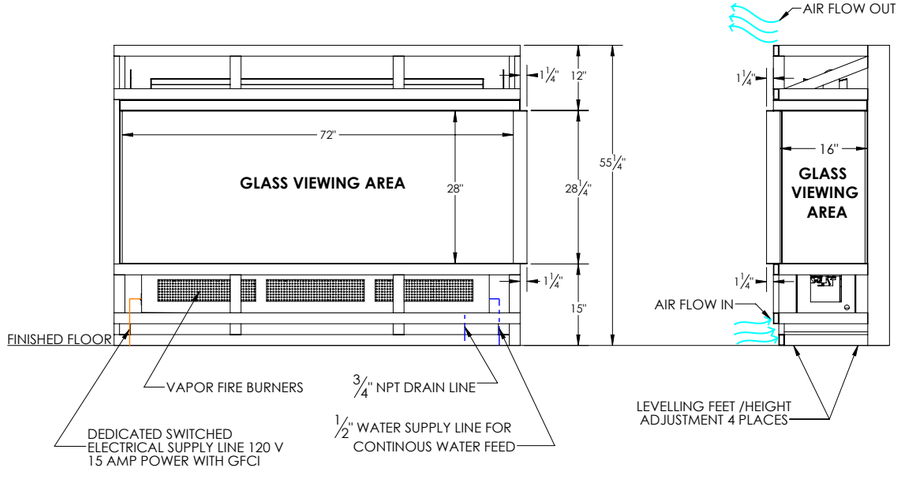

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	650 lbs.
Burner	3 X CDFI500P
Total Burner Length	60” Vapor-Fire Burner
Airflow Requirements	150 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

96” RIGHT-OPEN | Built-In Vapor-Fire

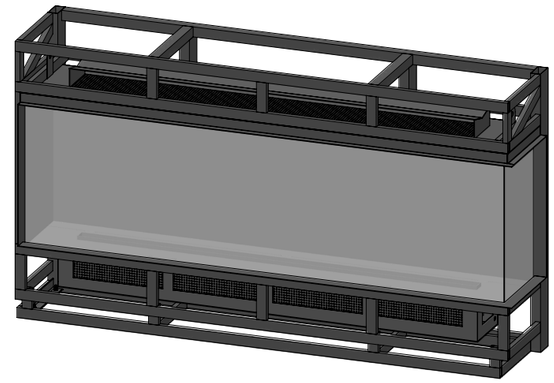

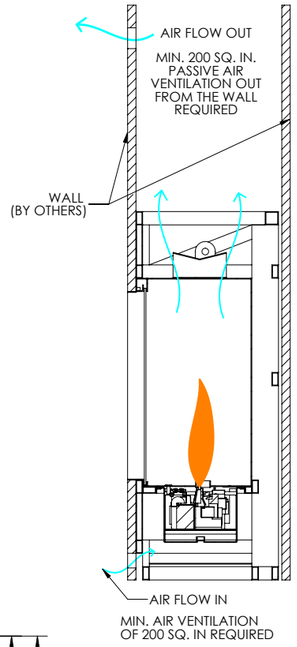

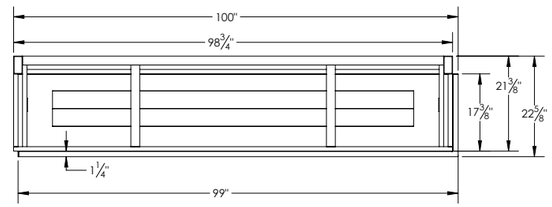

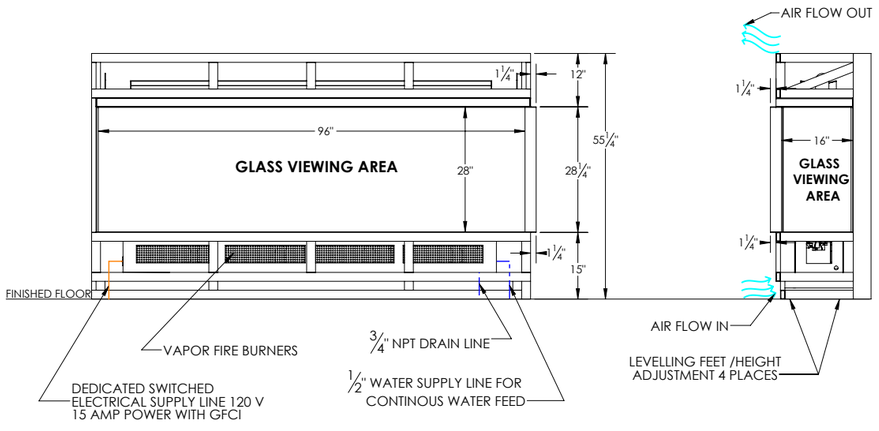

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	800 lbs.
Burner	4 X CDFI500P
Total Burner Length	80” Vapor-Fire Burner
Airflow Requirements	200 Square Inches

01/2026

PIER | Vapor-Fire

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.


32" PIER | Built-In Vapor-Fire

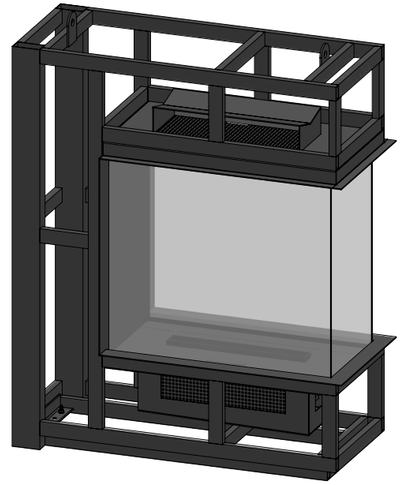

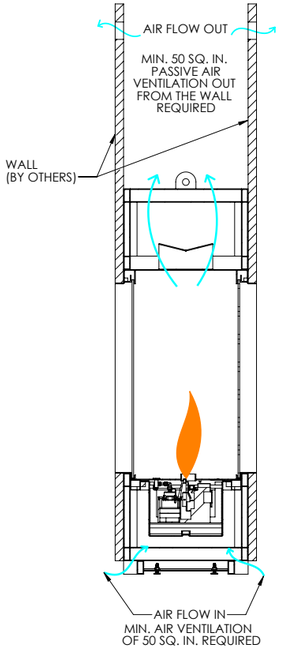

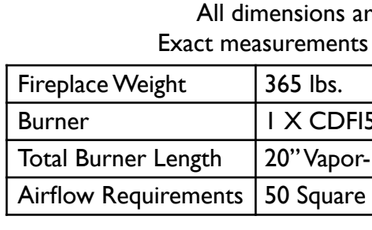

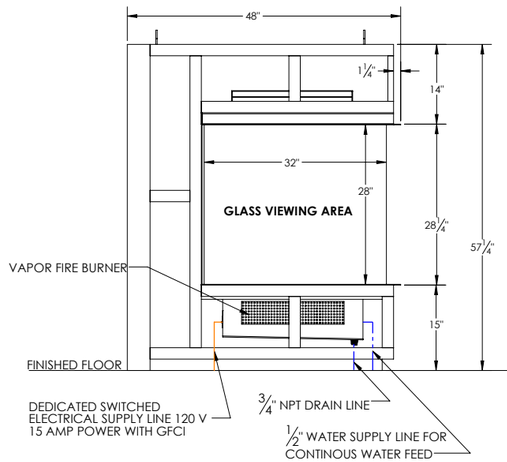

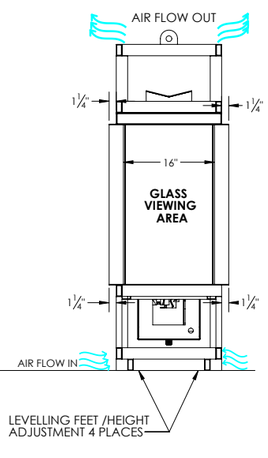

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	365 lbs.
Burner	1 X CDFI500P
Total Burner Length	20" Vapor-Fire Burner
Airflow Requirements	50 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

52” PIER | Built-In Vapor-Fire

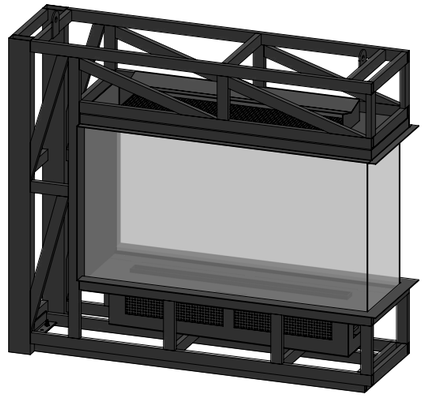

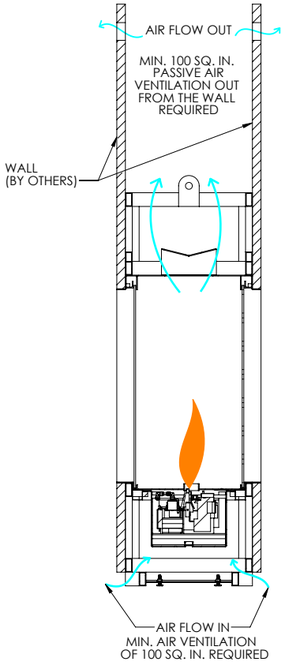

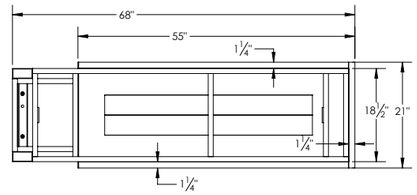

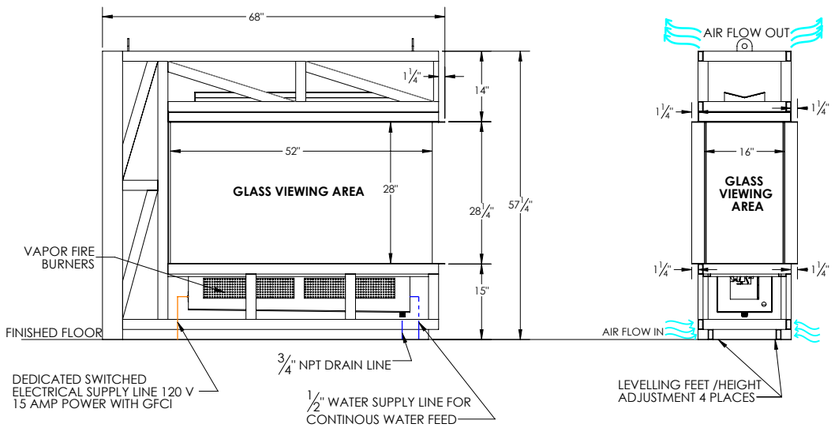

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	520 lbs.
Burner	2 X CDFI500P
Total Burner Length	40” Vapor-Fire Burner
Airflow Requirements	100 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

72" PIER | Built-In Vapor-Fire

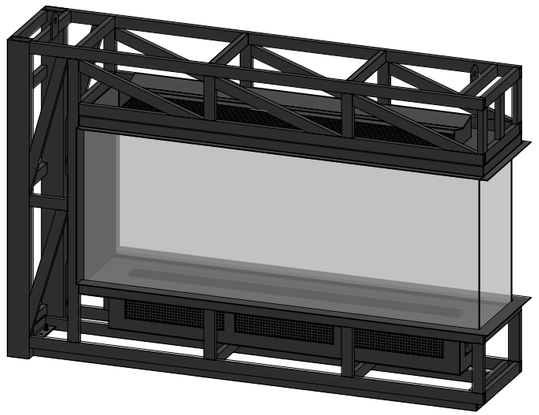

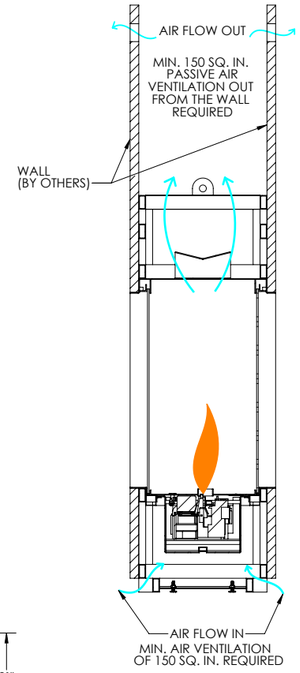

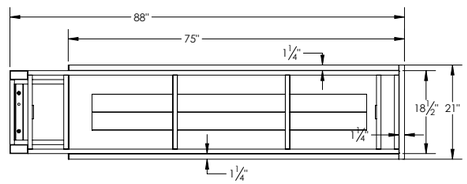

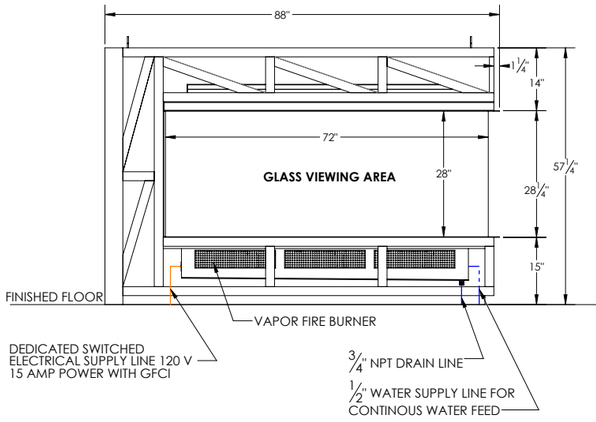

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	665 lbs.
Burner	3 X CDFI500P
Total Burner Length	60" Vapor-Fire Burner
Airflow Requirements	150 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.


96" PIER | Built-In Vapor-Fire

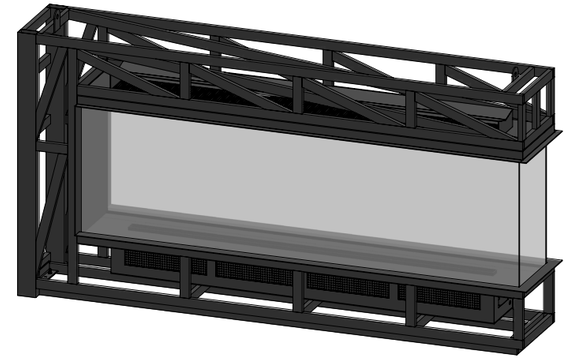

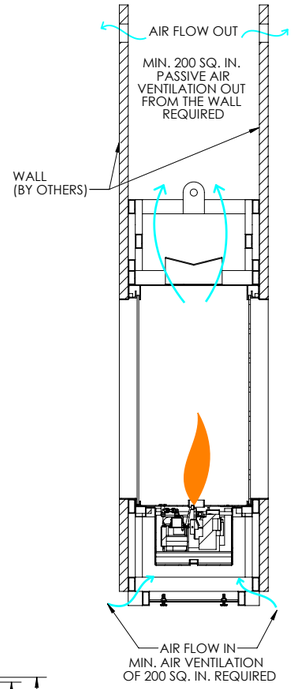

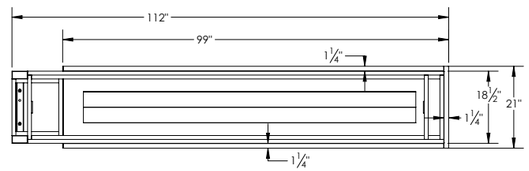

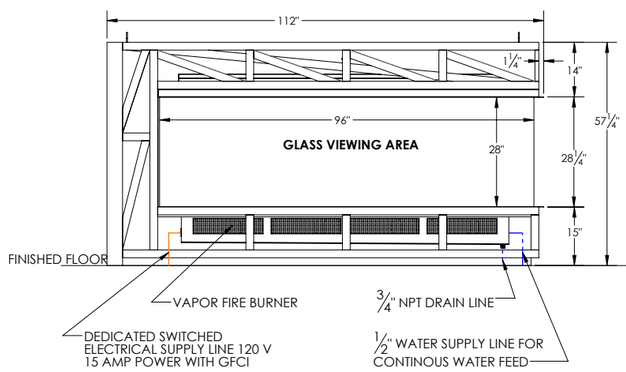

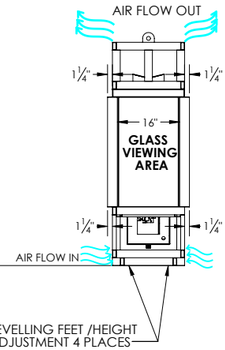

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	850 lbs.
Burner	4 X CDFI500P
Total Burner Length	80" Vapor-Fire Burner
Airflow Requirements	200 Square Inches

01/2026

PANORAMA | Vapor-Fire

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

32” PANORAMA | Built-In Vapor-Fire

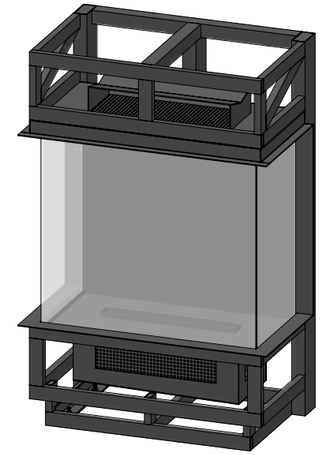

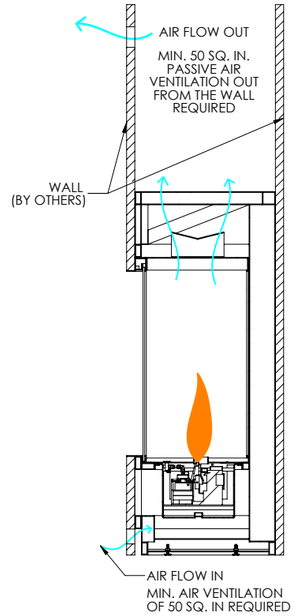

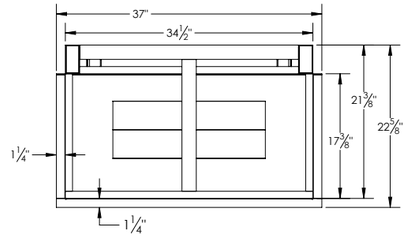

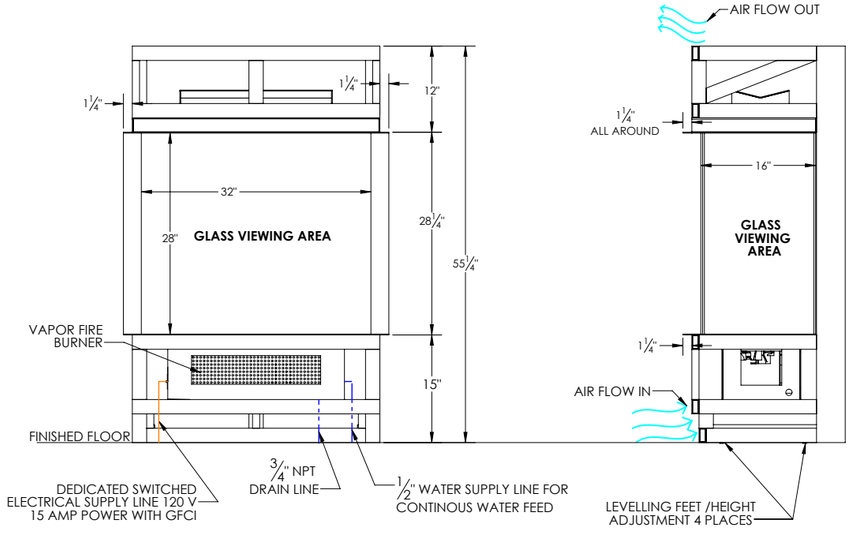

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	350 lbs.
Burner	1 X CDFI500P
Total Burner Length	20” Vapor-Fire Burner
Airflow Requirements	50 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

52" PANORAMA | Built-In Vapor-Fire

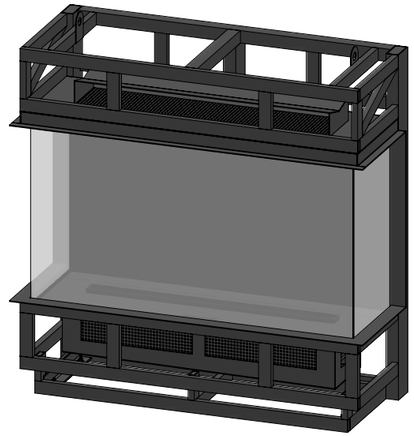

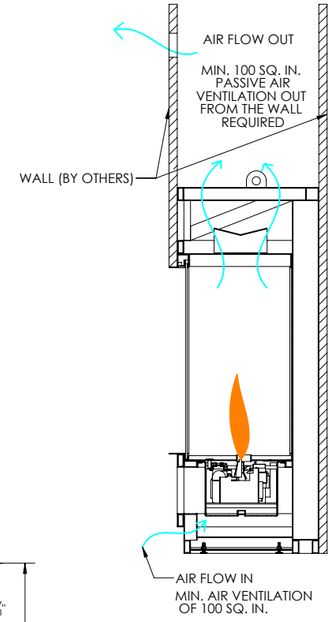

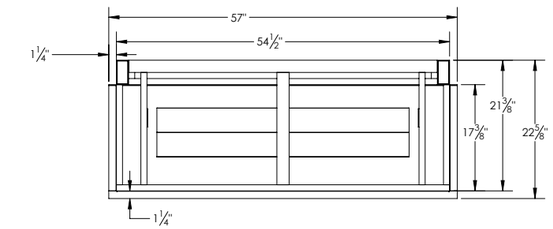

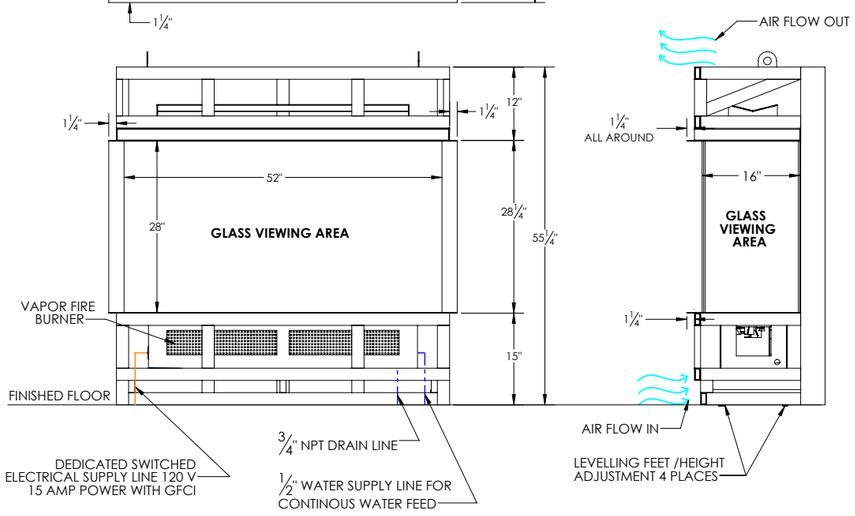

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	500 lbs.
Burner	2 X CDFI500P
Total Burner Length	40" Vapor-Fire Burner
Airflow Requirements	100 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½” reduced to ¼” factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾” drain line to a 1½” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

72” PANORAMA | Built-In Vapor-Fire

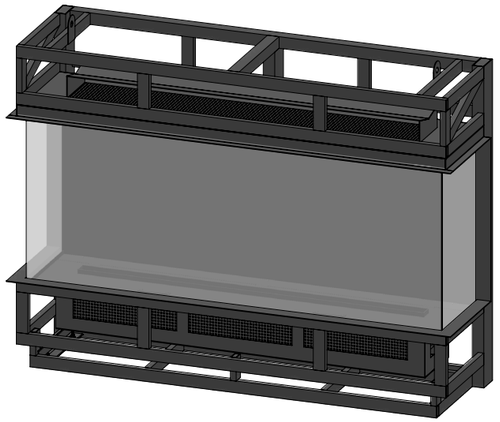

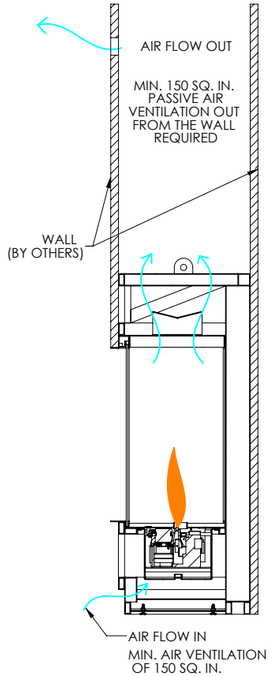

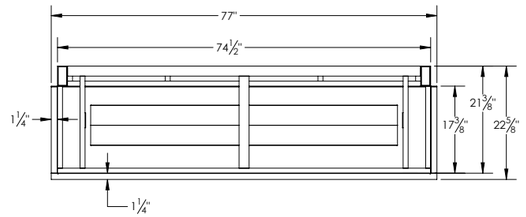

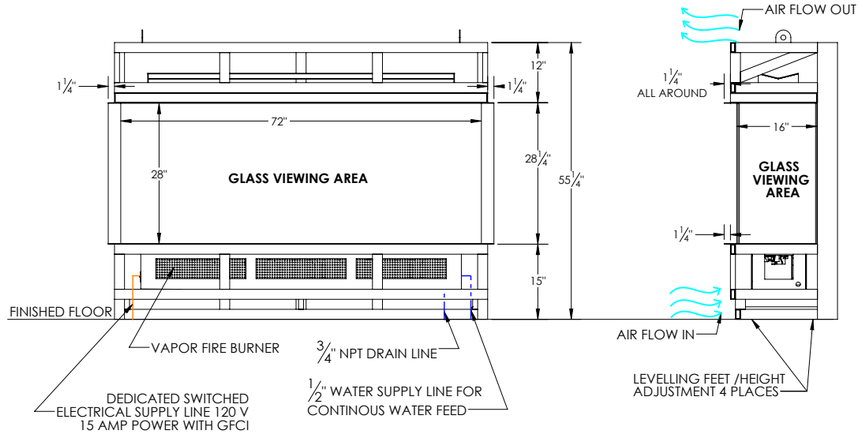

All dimensions are in Inches
Exact measurements may vary ±½”

Fireplace Weight	635 lbs.
Burner	3 X CDFI500P
Total Burner Length	60” Vapor-Fire Burner
Airflow Requirements	150 Square Inches

01/2026

GRANDVIEW | Fireplaces



Image shown is for illustration purpose and may include some optional features.

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2" framing clearance required for installation


OPTION 1:
Plumbed-In to main source water line, ½" reduced to ¼" factory set connection.


OPTION 2:
Removable 1L container for manual fill approx. 8-10 hour burn time.


Recommended: ¾" drain line to a 1½" floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)


Additional sizes and configurations available.

96" PANORAMA | Built-In Vapor-Fire

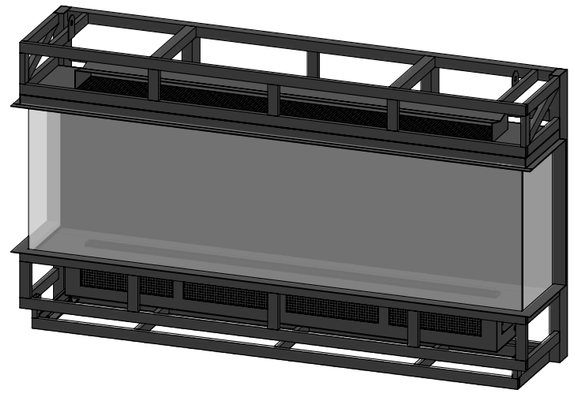

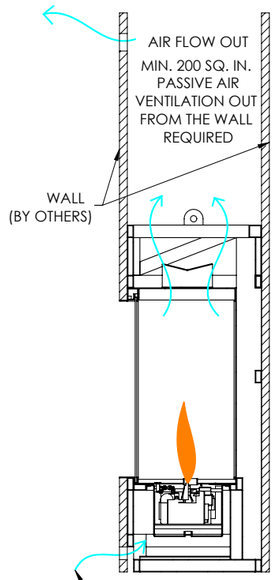

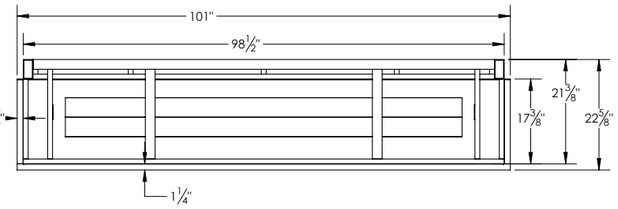

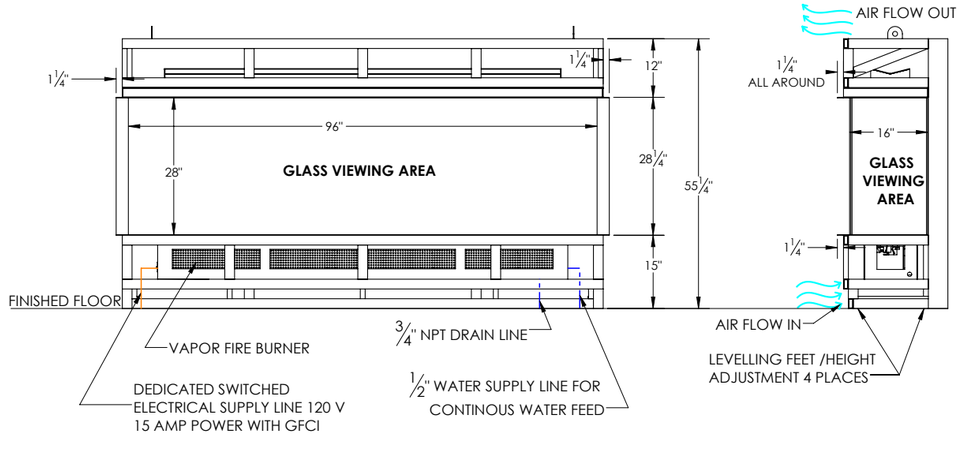

All dimensions are in Inches
Exact measurements may vary ±½"

Fireplace Weight	820 lbs.
Burner	4 X CDFI500P
Total Burner Length	80" Vapor-Fire Burner
Airflow Requirements	200 Square Inches

01/2026

GRANDVIEW Fireplaces Built-In Vapor-Fire Collection

North American Designed and Manufactured by
CF + D | custom fireplace design

GRANDVIEW Fireplaces built-in linear models are available in exclusive Single-Sided, See-Thru, Left-Open, Right-Open, Pier & Panorama options. These models are designed to be framed into the wall, becoming part of the integral wall structure, leaving an opening for the glass/flame viewing area.

Each unique model can be built to incorporate the Vapor-Fire burner technology system using water as a fuel source. With the variety of styles we have created, our clients now have an alternative fire-feature to fit into many projects whether residential, commercial or the hospitality sector.

Included with the purchase of a GRANDVIEW Fireplace Built-In Linear Vapor-Fire model are the following:

Vapor-Fire Burner Technology
Manual Fill Option for 8 - 10 hour burn time, or Plumbed-In Option for continuous burn time.

All fireplaces comes in Standard Factory Flat Black Paint Finish

Client's Choice of One Décor Media Option

There are a number of premium décor media option choices displayed in this booklet.
We hope this is helpful in making your selection to personalize your unique fireplace choice.

Please contact us to begin your next project.

Our creative design solutions are waiting!

**Some options outside of standard inclusions are available at an additional cost.*

Décor Media and Finishes


Midnight Black Rocks


White Marble Rocks


Sherlock Grey Rocks


Black Crushed Glass



White Crushed Glass


Gold Crushed Glass


Canoe Birch Twigs*


Central Park Twigs*


Riverbed Twigs*


*Lava granules included with all Twig sets.



Factory Flat Black


ALL STANDARD PRICED MODELS
PAINT FINISHED IN FACTORY
FLAT BLACK

CUSTOM GLOSS PAINT FINISH


RAL 9017 Traffic Black


RAL 3001 Signal Red


RAL 7012 Basalt Grey


RAL9016 Traffic White

CUSTOM FINISHES
Custom client-specified finishes are available by request (a sample must be provided).

CF + D | custom fireplace design

5230 Harvester Rd. Unit # 2, Burlington, ON, L7L 4X4

1.866.909.3070

www.customfireplacedesign.com