

VITA | Fireplaces

North American Designed & Manufactured by CF + D | custom fireplace design





Image shown is for illustration purpose and may include some optional features.

52" Single-Sided Built-In Linear Fireplace with Vapor-Fire Burner LAYOUT DRAWING

REV. I • JAN. 2025


CF + D | custom fireplace design
www.customfireplacedesign.com

VITA | Fireplaces

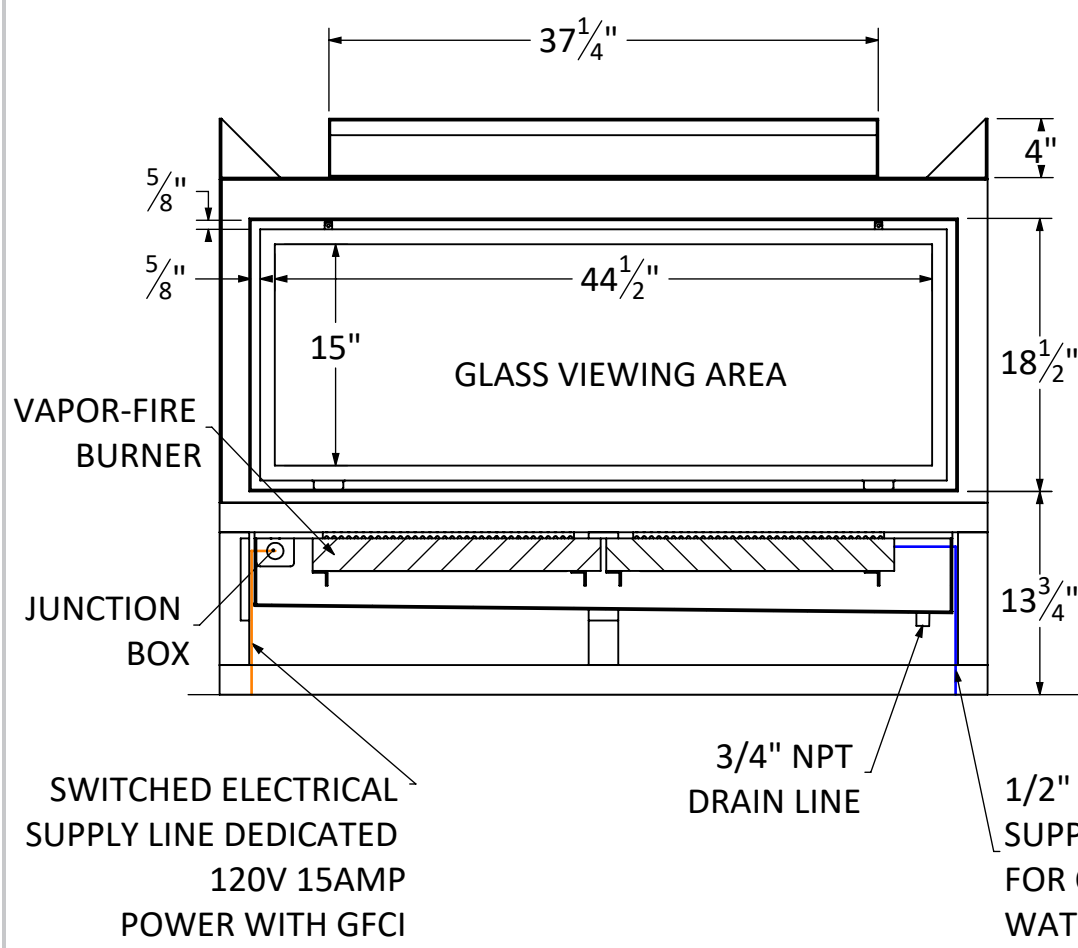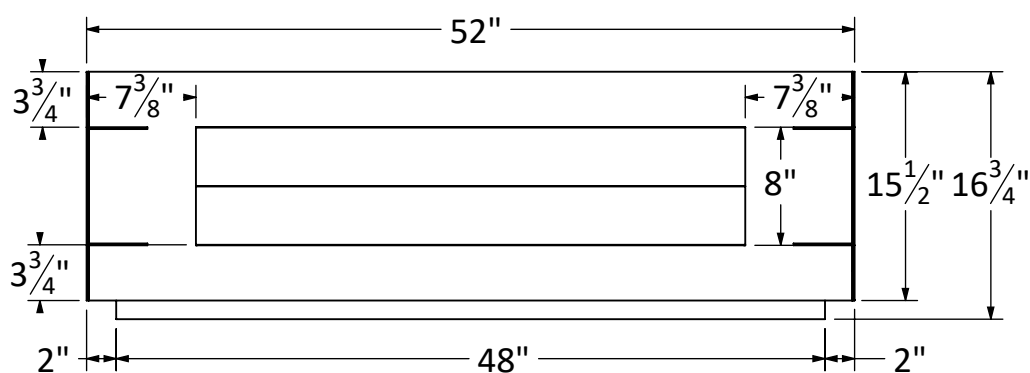

NOTE: Dedicated wall switch required for operation.

Fireplace Weight	305 lbs. approx.	UNLESS OTHERWISE SPECIFIED:		NAME	DATE	MODEL: 52” Single-Sided		
Burner	I x CDFI I000P	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN	MP	3/18/2019	TITLE: LAYOUT DRAWING		
Total Burner Length	40” Vapor-Fire Burner		CHECKED	MV	3/18/2019			
			ENG APPR.					
			MFG APPR.					
			Q.A.					
Airflow Requirements	100 Sq. Inches	INTERPRET GEOMETRIC TOLERANCING PER:	CF + D CUSTOM FIREPLACE DESIGN INC. 5230 HARVESTER RD. UNIT # 2 BURLINGTON, ONTARIO CANADA L7L 4X4 PHONE: 905-681-3070 FAX: 905-681-8697			SIZE	DWG. NO.	REV
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM FIREPLACE DESIGN INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM FIREPLACE DESIGN INC. IS PROHIBITED.		MATERIAL				A	LVF-03	0
		FINISH				SCALE: NTS		SHEET 2 OF 3
		DO NOT SCALE DRAWING						

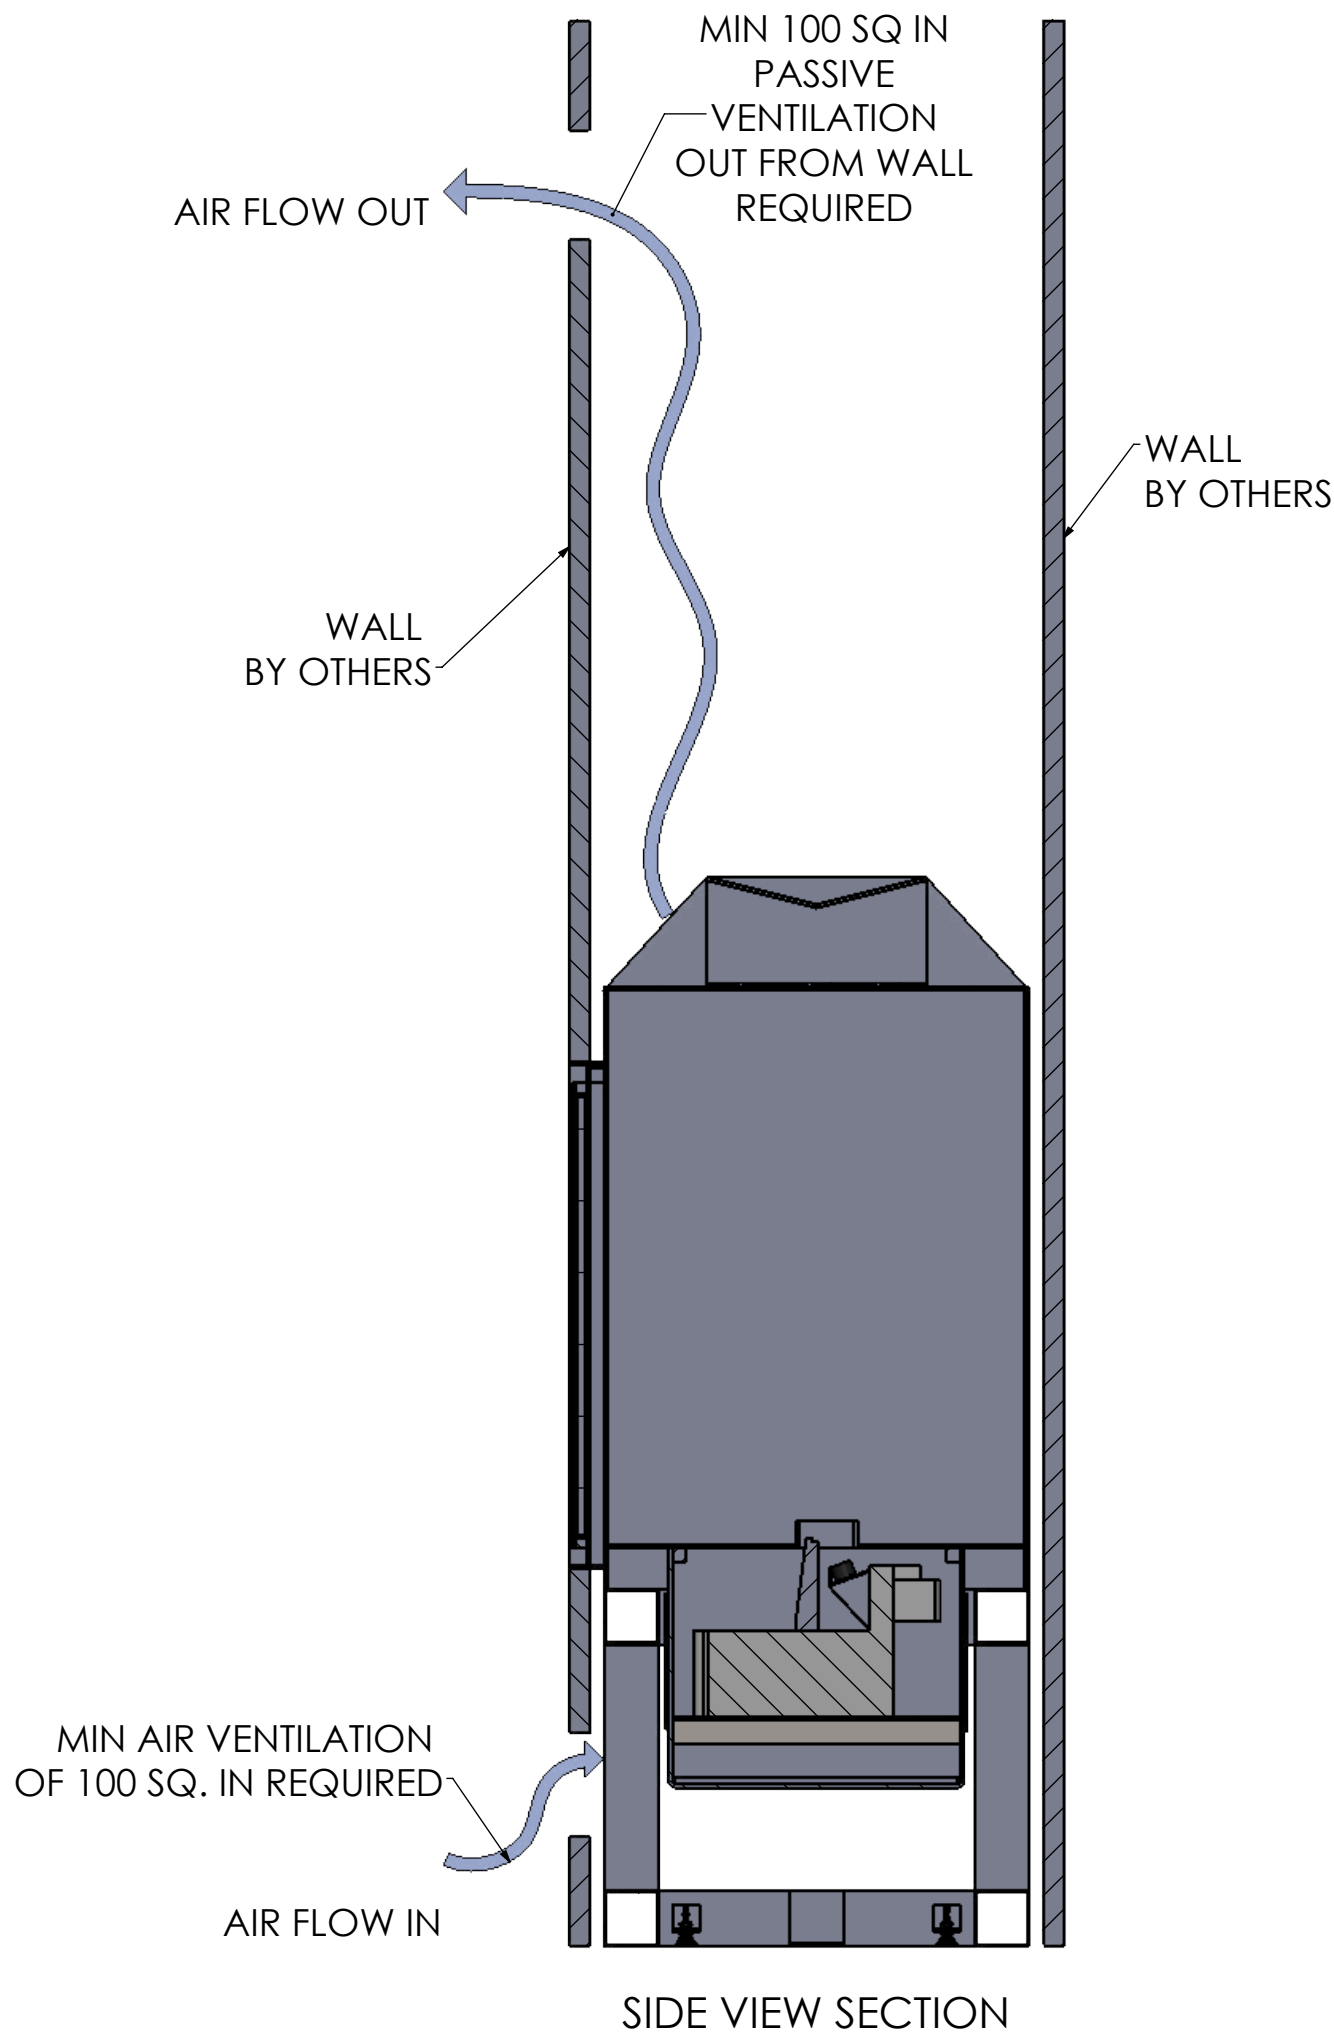

VITA | Fireplaces

52” Single-Sided | Built-In Linear Fireplace with Vapor-Fire Burner

Product Information

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Dedicated wall switch required for operation
- Heat available
- 2” framing clearance required for installation

WATER SOURCE OPTIONS

- OPTION 1: Plumbed-In to main source water line, 1/2” reduced to 1/4” factory set connection.
- OPTION 2: Removable 1L container for manual fill approx. 8-10 hour burn time.

Recommended: 3/4” drain line to a 1 1/2” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)

Note: Exact measurements may vary $\pm 1/2$ ”.

North American Designed & Manufactured
by
CF + D | custom fireplace design

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm$
ANGULAR: MACH $\pm$ BEND $\pm$
TWO PLACE DECIMAL $\pm$
THREE PLACE DECIMAL $\pm$

INTERPRET GEOMETRIC
TOLERANCING PER:

MATERIAL

FINISH

DO NOT SCALE DRAWING

NAME

MP

MV

ENG APPR.

MFG APPR.

Q.A.

DATE

3/18/2019

3/18/2019

MODEL:

52” Single-Sided

TITLE:

AIRFLOW REQUIREMENT

SIZE

A

DWG. NO.

LVF-03

REV

0

SCALE: NTS

SHEET 3 OF 3

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM FIREPLACE DESIGN INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM FIREPLACE DESIGN INC. IS PROHIBITED.