

GRANDVIEW | Fireplaces

North American Designed & Manufactured by CF + D | custom fireplace design



Image shown is for illustration purpose and may include some optional features.

96" PIER

Built-In Fireplace with Vapor-Fire Burner

LAYOUT DRAWING





REV. I • NOVEMBER 2025

CF + D | custom fireplace design


www.customfireplacedesign.com

GRANDVIEW | Fireplaces

96” PIER | Built-In Fireplace with Vapor-Fire Burner

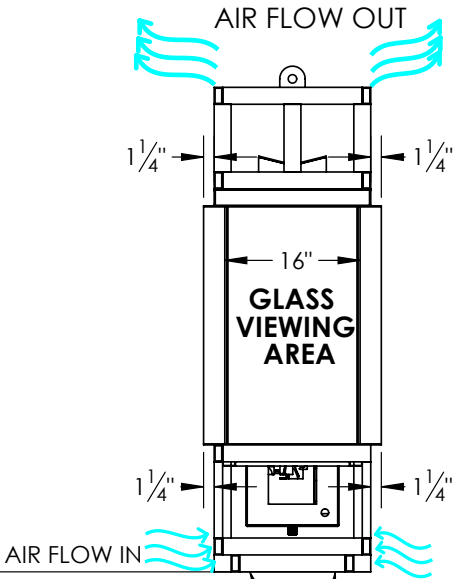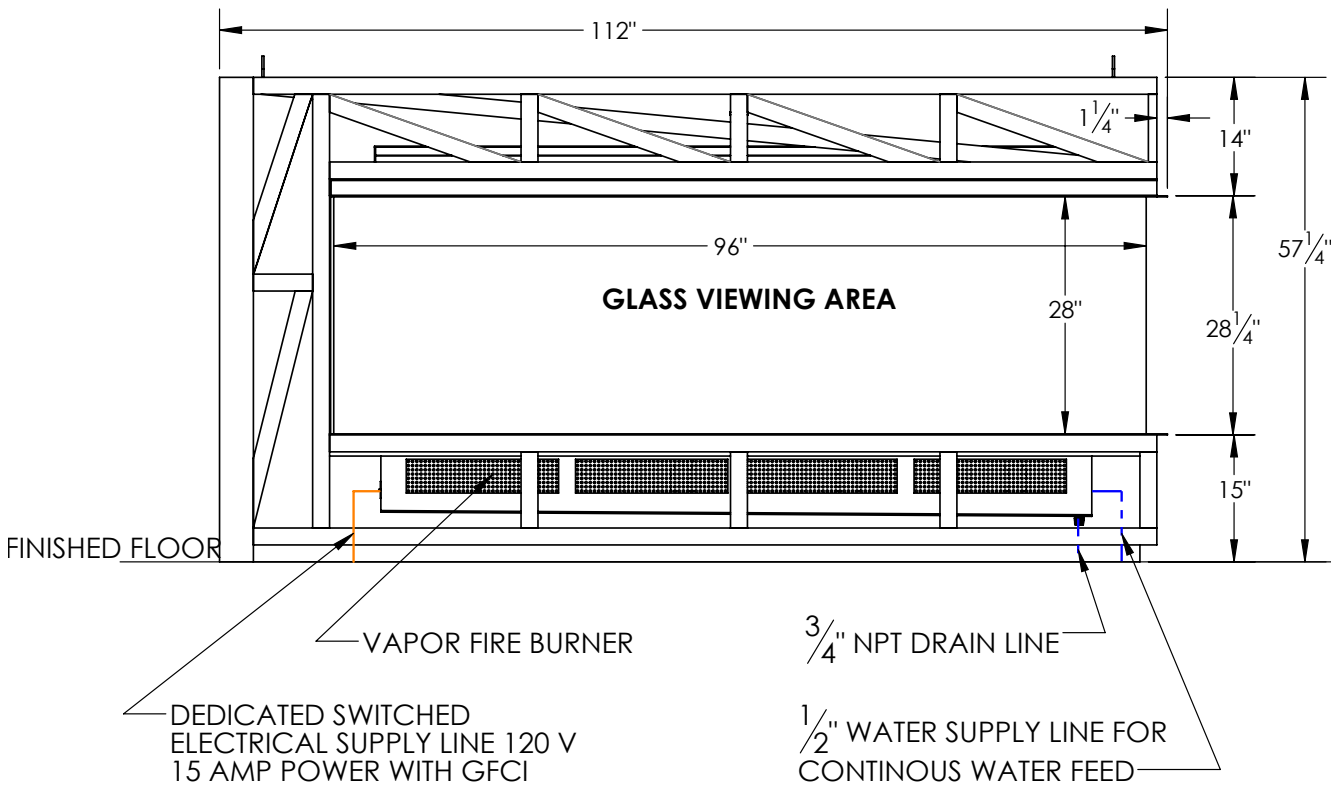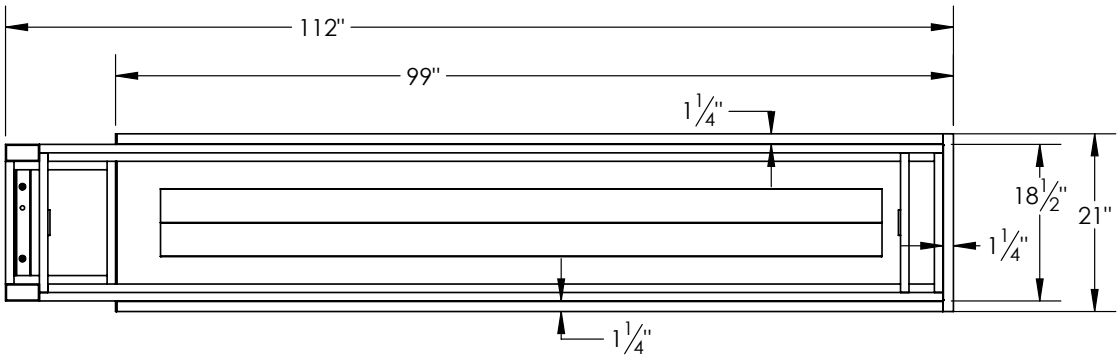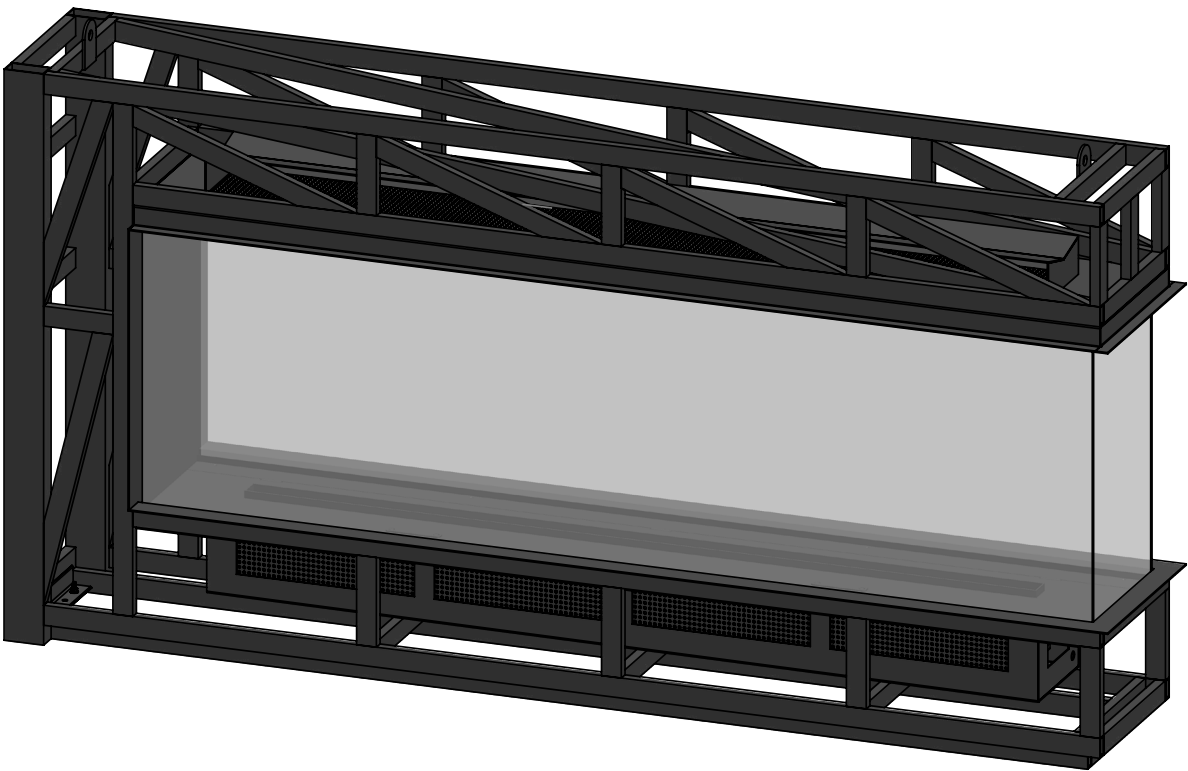

Fireplace Weight	850 lbs.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ± INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL	DRAWN	PT	8/14/2025	MODEL: 96” PIER		
Burner	4 X CDFI500P		CHECKED	BV	8/14/2025	TITLE: LAYOUT DRAWING		
Total Burner Length	80” Vapor-Fire Burner		ENG APPR.					
Airflow Requirements	200 Square Inches		MFG APPR.					
PROPRIETARY AND CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM FIREPLACE DESIGN INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM FIREPLACE DESIGN INC. IS PROHIBITED.			Q.A.			SIZE DWG. NO. REV		
		CF + D CUSTOM FIREPLACE DESIGN INC. 5230 HARVESTER RD. UNIT # 2 BURLINGTON, ONTARIO CANADA L7L 4X4 PHONE: 905-681-3070 FAX: 905-681-8697			A	GVPI96 - 01		0
					SCALE: NTS		SHEET 2 OF 3	
		FINISH						
		DO NOT SCALE DRAWING						

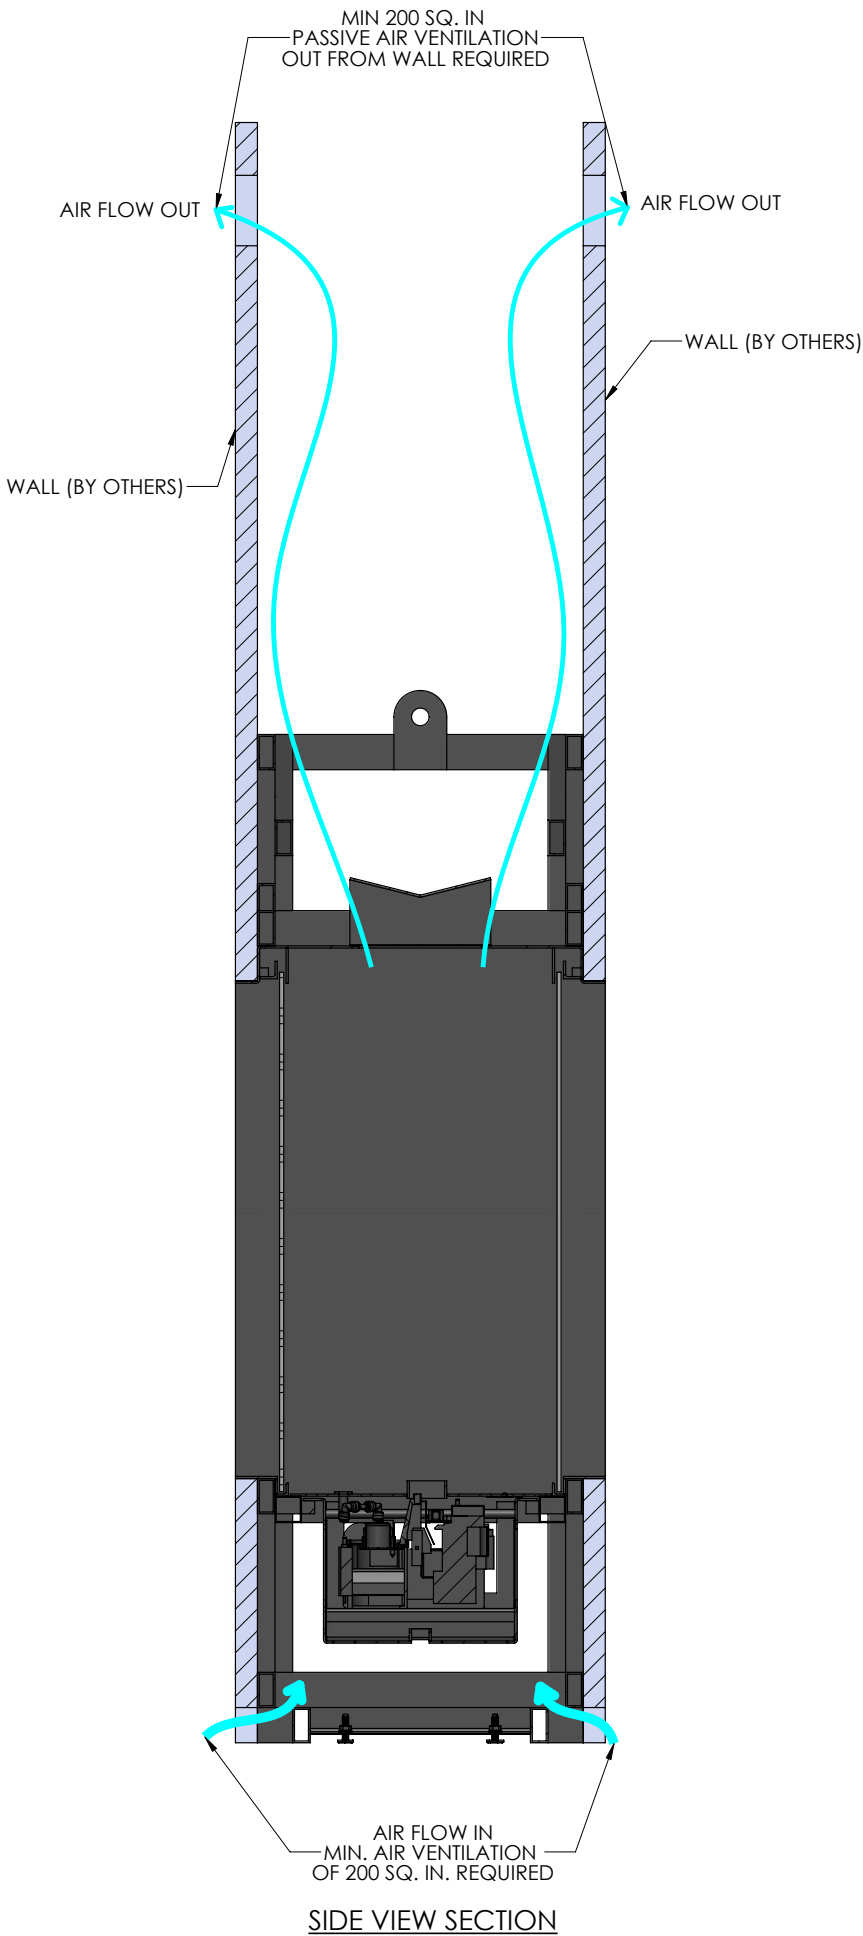

GRANDVIEW | Fireplaces

96” PIER | Built-In Fireplace with Vapor-Fire Burner

Product Information

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation

WATER SOURCE OPTIONS

- OPTION 1: Plumbed-In to main source water line, 1/2” reduced to 1/4” factory set connection.
- OPTION 2: Removable 1L container for manual fill approx. 8-10 hour burn time.

Recommended: 3/4” drain line to a 1 1/2” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)

Note: Exact measurements may vary ±1/2”.

North American Designed & Manufactured
by
CF + D | custom fireplace design

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM FIREPLACE DESIGN INC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM FIREPLACE DESIGN INC.
IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		MODEL: 96” PIER			
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN	PT	8/14/2025		TITLE: AIRFLOW REQUIREMENT			
		CHECKED	BV	8/14/2025					
		ENG APPR.							
		MFG APPR.							
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.							
MATERIAL		CF + D CUSTOM FIREPLACE DESIGN INC. 5230 HARVESTER RD. UNIT # 2 BURLINGTON, ONTARIO CANADA L7L 4X4 PHONE: 905-681-3070 FAX: 905-681-8697				SIZE	DWG. NO.		REV
FINISH						A	GVPI96 - 01		0
DO NOT SCALE DRAWING						SCALE: NTS		SHEET 3 OF 3	