

GRANDVIEW | Fireplaces

North American Designed & Manufactured by CF + D | custom fireplace design



Image shown is for illustration purpose and may include some optional features.

96" SINGLE-SIDED

Built-In Fireplace with Vapor-Fire Burner

LAYOUT DRAWING




REV. I • NOVEMBER 2025

CF + D | custom fireplace design


www.customfireplacedesign.com

GRANDVIEW | Fireplaces

96” SINGLE-SIDED | Built-In Fireplace with Vapor-Fire Burner

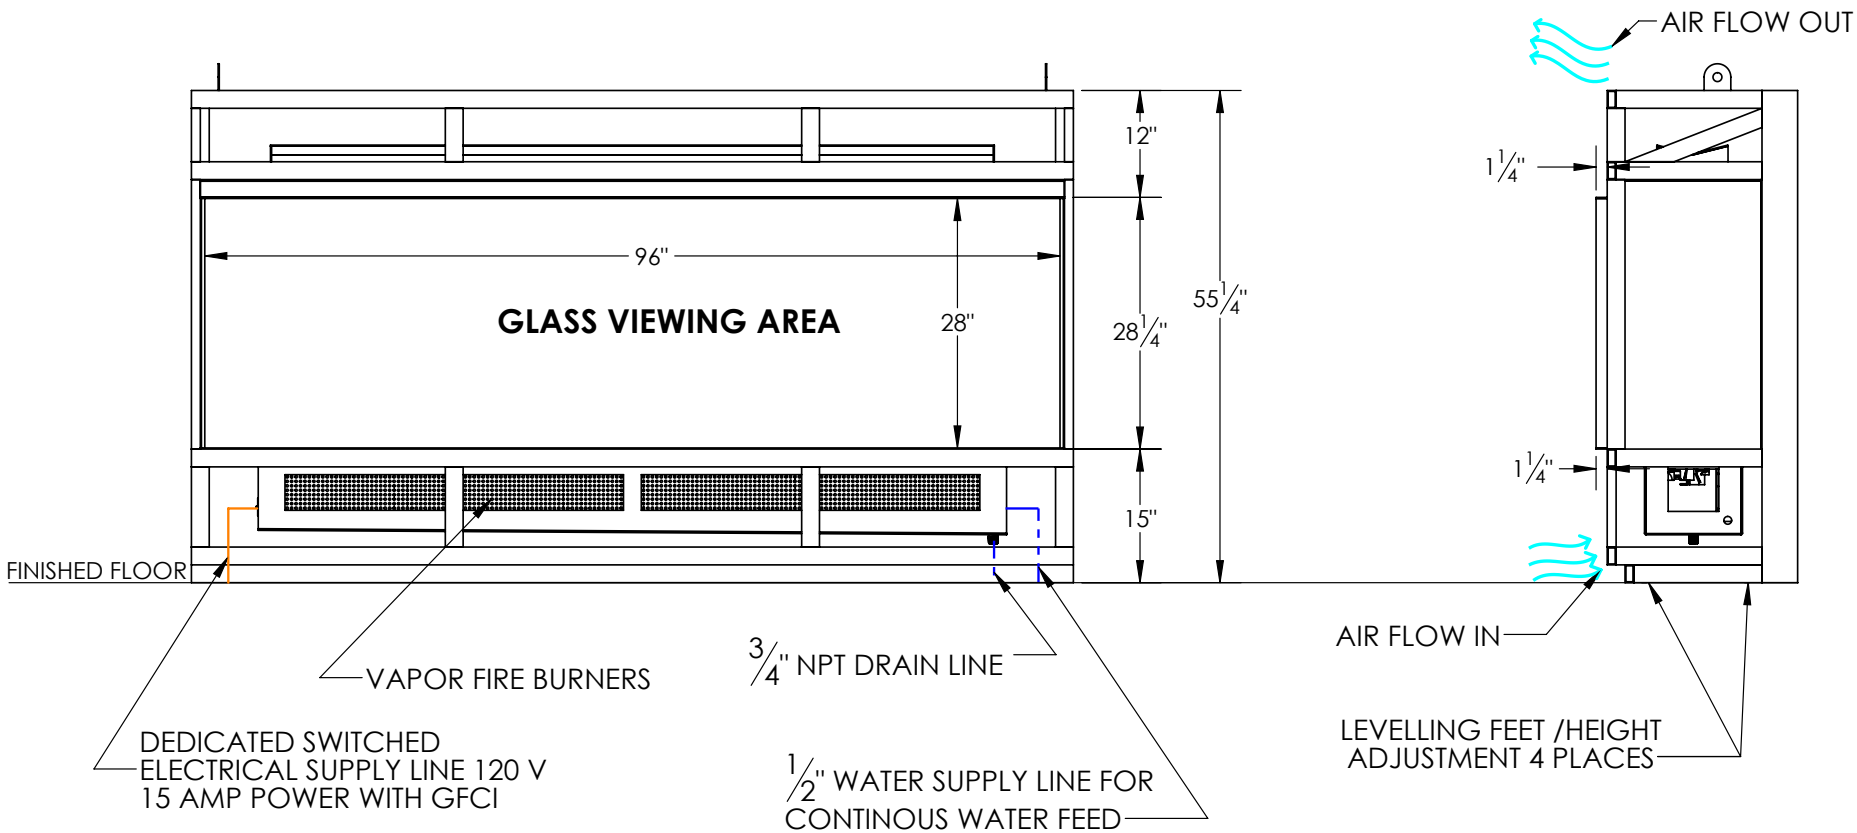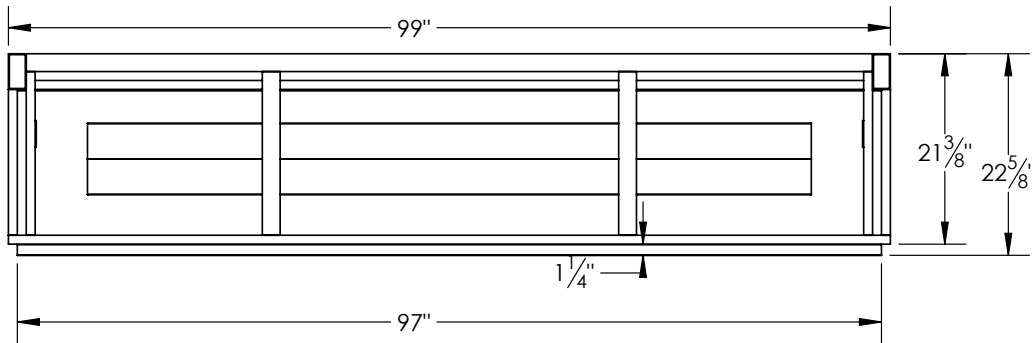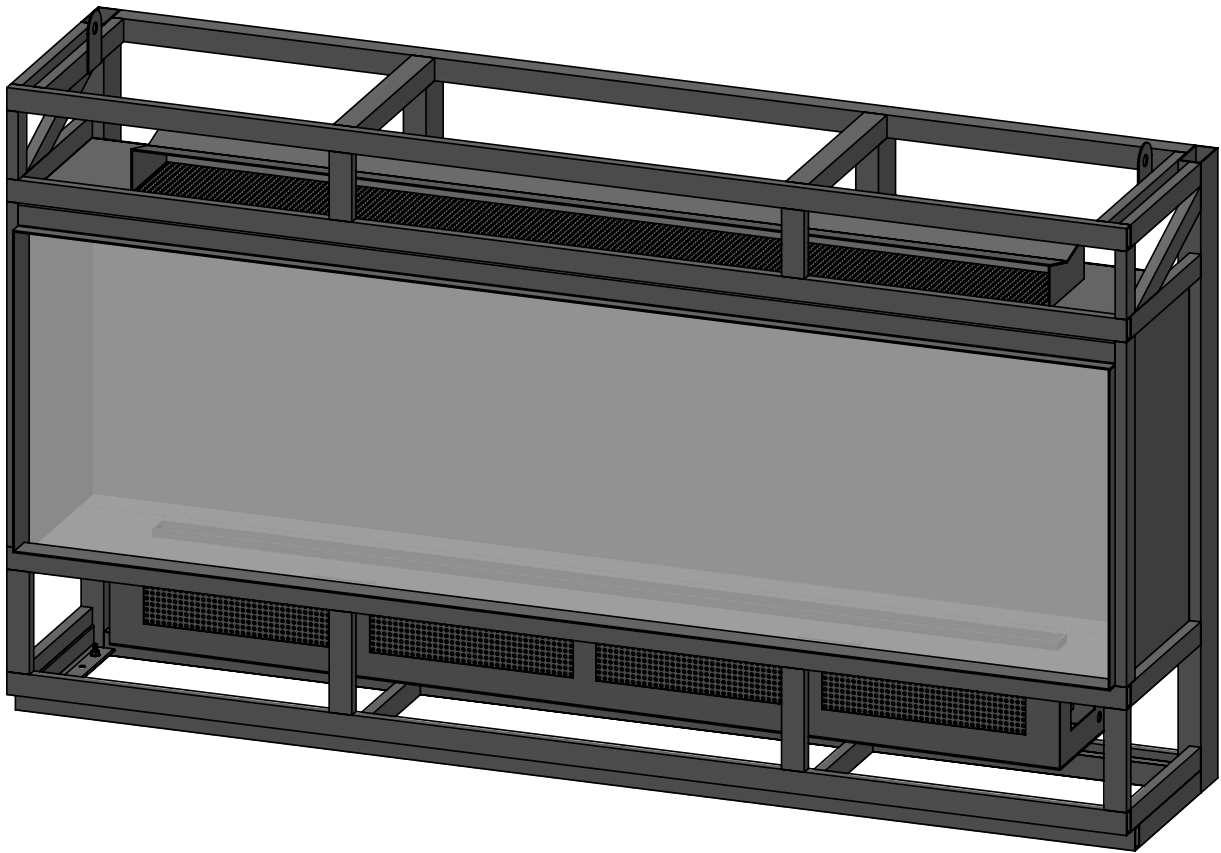

Fireplace Weight	830 lbs.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ± INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL FINISH DO NOT SCALE DRAWING		NAME	DATE	MODEL: 96” SINGLE-SIDED			
Burner	4 X CDFI500P		DRAWN	PT	8/14/2025	TITLE: LAYOUT DRAWING			
Total Burner Length	80” Vapor-Fire Burner		CHECKED	BV	8/14/2025				
Airflow Requirements	200 Square Inches		ENG APPR.						
			MFG APPR.						
Q.A.									
CF + D CUSTOM FIREPLACE DESIGN INC. 5230 HARVESTER RD. UNIT # 2 BURLINGTON, ONTARIO CANADA L7L 4X4 PHONE: 905-681-3070 FAX: 905-681-8697			SIZE A	DWG. NO. GVSS96 - 01	REV 0				
			SCALE: NTS		SHEET 2 OF 3				
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM FIREPLACE DESIGN INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM FIREPLACE DESIGN INC. IS PROHIBITED.									

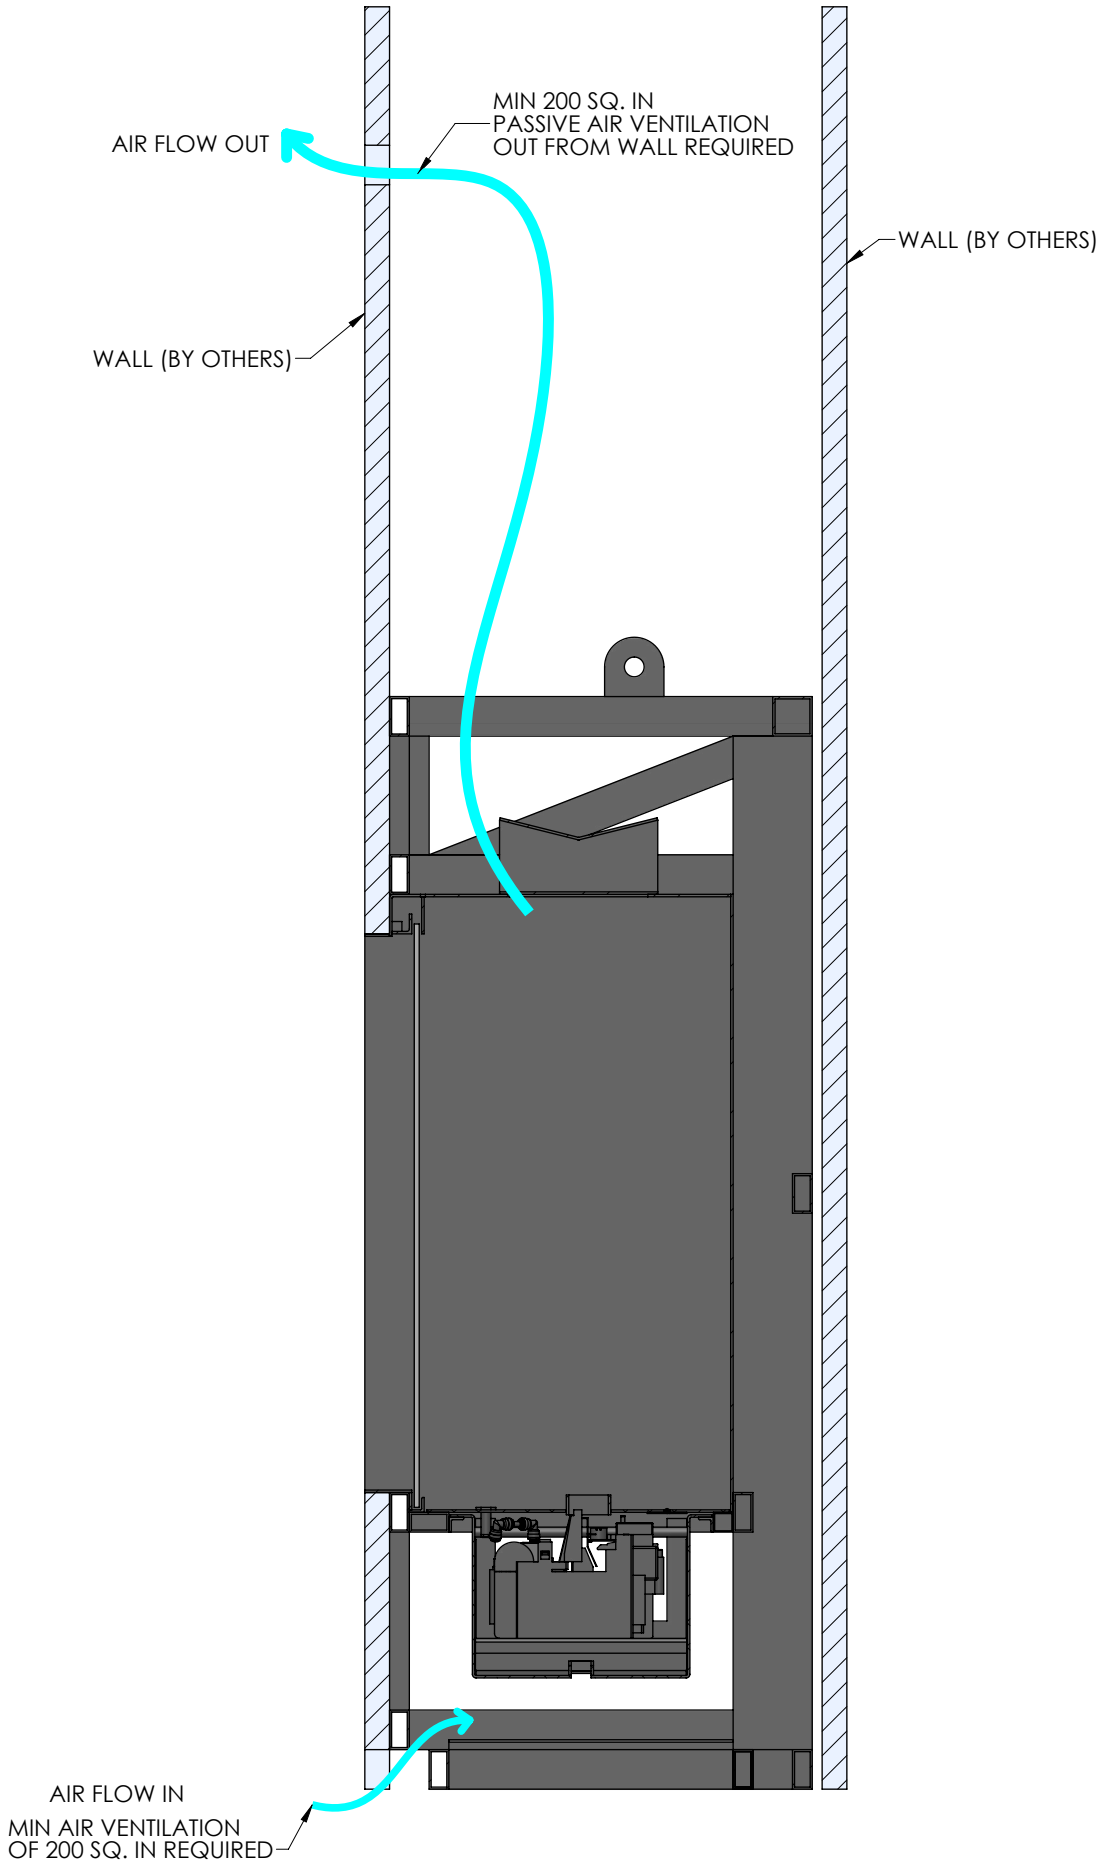

SIDE VIEW SECTION

GRANDVIEW | Fireplaces

96” SINGLE-SIDED | Built-In Fireplace with Vapor-Fire Burner

Product Information

- Vapor-Fire burner technology
- Realistic flame without heat
- No chimney venting requirements
- Safe to the touch
- Fueled by regular tap water (softened/filtered water if required)
- 120 Volt 15 Amp-GFCI
- All fireplaces factory Flat Black finish
- Custom Client finishes are available by request. Sample required.
- Heat available
- Dedicated wall switch required for operation
- 2” framing clearance required for installation

WATER SOURCE OPTIONS

- OPTION 1: Plumbed-In to main source water line, 1/2” reduced to 1/4” factory set connection.
- OPTION 2: Removable 1L container for manual fill approx. 8-10 hour burn time.

Recommended: 3/4” drain line to a 1 1/2” floor drain OR condensate pump OR moisture alarm for potential leak management. (Not mandatory)

Note: Exact measurements may vary ±1/2”.

North American Designed & Manufactured
by
CF + D | custom fireplace design

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM FIREPLACE DESIGN INC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM FIREPLACE DESIGN INC.
IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		MODEL: 96” SINGLE-SIDED			
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN	PT	8/14/2025		TITLE: AIRFLOW REQUIREMENT			
		CHECKED	BV	8/14/2025					
		ENG APPR.							
		MFG APPR.							
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.							
MATERIAL		CF + D CUSTOM FIREPLACE DESIGN INC. 5230 HARVESTER RD. UNIT # 2 BURLINGTON, ONTARIO CANADA L7L 4X4 PHONE: 905-681-3070 FAX: 905-681-8697				SIZE	DWG. NO.		REV
FINISH						A	GVSS96 - 01		0
DO NOT SCALE DRAWING						SCALE: NTS		SHEET 3 OF 3	